
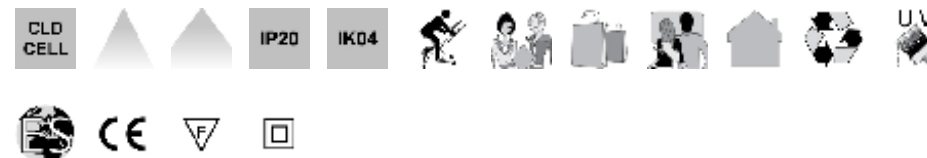


Mac - LED 7W - DIMM - 220-240V

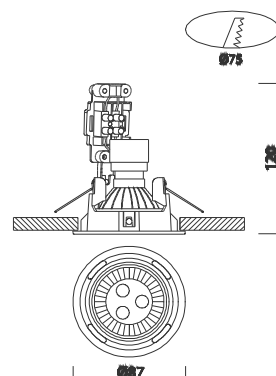

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22061012-00	CLD CELL	0.30	white	0x0x120 Ø87	7	POWERLED 7W-GU10-450lm-3000K - 25°
22061072-00	CLD CELL	0.30	met. silver	0x0x120 Ø87	7	POWERLED 7W-GU10-450lm-3000K - 25°
22061032-00	CLD CELL	0.30	black	0x0x120 Ø87	7	POWERLED 7W-GU10-450lm-3000K - 25°
22061062-00	CLD CELL	0.30	chrome	0x0x120 Ø87	7	POWERLED 7W-GU10-450lm-3000K - 25°
22061082-00	CLD CELL	0.30	Gold	0x0x120 Ø87	7	POWERLED 7W-GU10-450lm-3000K - 25°
22061092-00	CLD CELL	0.30	shiny brass	0x0x120 Ø87	7	POWERLED 7W-GU10-450lm-3000K - 25°
22061014-00	CLD CELL	0.30	white	0x0x120 Ø87	7	POWERLED 7W-GU10-450lm-3000K - 40°
22061074-00	CLD CELL	0.30	met. silver	0x0x120 Ø87	7	POWERLED 7W-GU10-450lm-3000K - 40°
22061034-00	CLD CELL	0.30	black	0x0x120 Ø87	7	POWERLED 7W-GU10-450lm-3000K - 40°
22061064-00	CLD CELL	0.30	chrome	0x0x120 Ø87	7	POWERLED 7W-GU10-450lm-3000K - 40°
22061084-00	CLD CELL	0.30	Gold	0x0x120 Ø87	7	POWERLED 7W-GU10-450lm-3000K - 40°
22061094-00	CLD CELL	0.30	shiny brass	0x0x120 Ø87	7	POWERLED 7W-GU10-450lm-3000K - 40°

A line of recessed spotlight made from die-cast zamak. With internal housing allowing installers to choose to mount the fixture flush with the ceiling or protruding, for greater control of the beam's direction (0° - 20°).

Optionally these fixtures can be installed on shooks (step 100)

Housing: Die-cast zamak, with a steel bracket holding the terminal block. Includes springs for recessed mounting.

Lampholder: Ceramic with silver-plated contacts.

Coating: Humidity-resistant acrylic-resin liquid paint, UV-stabilised,. A different galvanic finishing process is used for chromium-plated and polished brass versions.