

CLD
S+L

Download


DXF 2D
- 61570.dxf

Montaggi
- M60 rev5.pdf



M60 LED white

Housing: Turned aluminium.
 Wiring: Separate 350/700mA dc transformer; RGB version can be used with a MASTER and SLAVE control module.
 Equipment: Standard version supplied complete with self-tapping screws for installation on wooden, plasterboard or sheet metal panels; supplied with screws and anchoring brackets for ø 60mm circular profile section for installation on brick walls.
 Standards: Products comply with EN 60598-1-CEI 34.21 standards, with a level of protection complying with EN 60529 standards.
 Power factor: 0.8
 Luminous flux maintenance: 70% 25000h (L70B50)

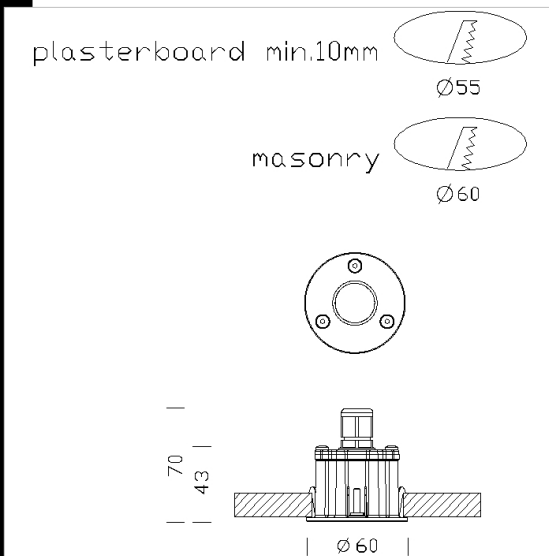

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22061511-2191	CLD S+L	0.00	LED-225lm-3000K-24°-CRI 80	3 W	116
22061512-2191	CLD S+L	0.00	LED-450lm-3000K-24°-CRI 80	3 W	0
22061571-00	CLD S+L	0.20	LED-450lm-3000K-24°-CRI 80	3 W	ARGENTO
22061512-00	CLD S+L	0.20	LED-450lm-3000K-24°-CRI 80	3 W	BIANCO
22061562-00	CLD S+L	0.20	LED-225lm-3000K-24°-CRI 80	1 W	CROMATO
22061511-00	CLD S+L	0.20	LED-225lm-3000K-24°-CRI 80	1 W	BIANCO
22061563-00	CLD S+L	0.20	LED-450lm-3000K-24°-CRI 80	3 W	CROMATO
22061570-00	CLD S+L	0.20	LED-225lm-3000K-24°-CRI 80	1 W	ARGENTO

Accessories



- 700mA LED power supply



- 350mA LED power supply

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated