



Download

DXF 2D
- 61570.dxf
Montaggi
- M60 rev5.pdf



M60 LED FULLCOLOR RGB

Housing: Turned aluminium.

Wiring: Separate 350/700mA dc transformer; RGB version can be used with a MASTER and SLAVE control module.


Equipment: Standard version supplied complete with self-tapping screws for installation on wooden, plasterboard or sheet metal panels; supplied with screws and anchoring brackets for Ø 60mm circular profile section for installation on brick walls.

Standards: Products comply with EN 60598-1-CEI 34.21 standards, with a level of protection complying with EN 60529 standards.

Complete with POWERLED RGB 3.2W - R30 / G40 / B9 - 25°

Lens opening angle can be selected (10°-25°-30°-40°).

Supplied complete with self-tapping screws for installation on wood, plasterboard or sheet metal panels. MASTER (code 22090870-00) and SLAVE (code 22090871-00) can be purchased separately if 9 spotlights are to be operated in synchronous mode.

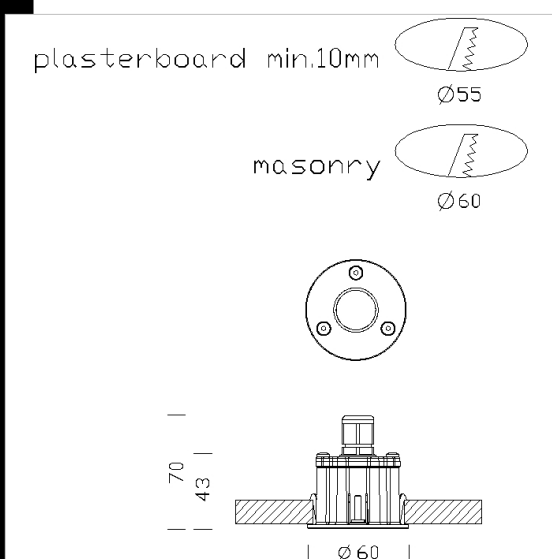

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22061566-00	CLD S+L	0.15	LED 3.2W RGB-R30 G40 B9--	3 W	CROMATO
22061575-00	CLD S+L	0.15	LED 3.2W RGB-R30 G40 B9--	3 W	ARGENTO
22061516-00	CLD S+L	0.15	LED 3.2W RGB-R30 G40 B9--	3 W	BIANCO

Accessories



- Kit 2



- RGB Remote



- LED Master+ IRE



- LED slave



- Kit 3



- Amplifier / DMX signal
modulator Kit



- Kit 1

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated