

Download


DXF 2D
- marte10.dxf

Montaggi
- MARTE_4...12 rev7.pdf



Marte 10

Housing: made of die-cast aluminium complete with spring clips for recessed mounting. Lens: in PMMA with high efficiency output and very low glare rate. Regulations: Produced according to applicable EN60598 - CEI 34 - 21 standards, degree of protection according to EN 60529 standards. LED: luminous flux maintenance 80%: 50.000h (L80B20). On request 50.000h. Power factor >0.9. Photobiological safety class: exempt group EN62471.

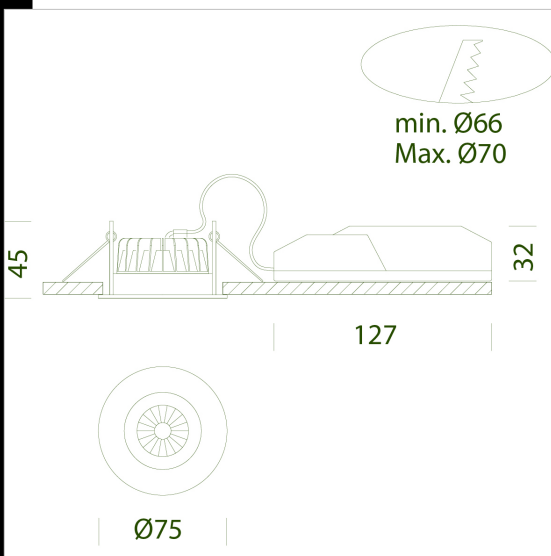

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22061801-00	CLD CELL	0,20	LED COB-703lm-3000K-40°-CRI 93	6 W	WHITE
22061801-68	CLD CELL	0,20	LED COB-752lm-4000K-40°-CRI 93	6 W	WHITE
22061801-1241	CLD CELL-D-D	0,20	LED COB-703lm-3000K-40°-CRI 93	7 W	WHITE
22061801-6841	CLD CELL-D-D	0,25	LED COB-752lm-4000K-40°-CRI 93	6 W	WHITE
22061801-09	CLD CELL-E	0,20	LED COB-703lm-3000K-40°-CRI 93	6 W	WHITE
22061801-6809	CLD CELL-E	0,70	LED COB-752lm-4000K-40°-CRI 93	7 W	WHITE
22061801-31	CLD CELL-E	0,70	LED COB-703lm-3000K-40°-CRI 93	7 W	WHITE
22061801-3113	CLD CELL-E	0,70	LED COB-752lm-4000K-40°-CRI 93	7 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated