


Marte 11

Housing: made of die-cast aluminium complete with spring clips for recessed mounting. Lens: in PMMA with high efficiency output and very low glare rate
 Regulations: Produced according to applicable EN60598 - CEI 34 - 21 standards, degree of protection according to EN 60529 standards LED: luminous flux maintenance 80%: 50.000h (L80B20). On request 50.000h. Power factor >0.9.
 Photobiological safety class: exempt group EN62471.



Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22061802-00	CLD	0,24	LED COB-820lm-3000K-40°-CRI 92	9 W	WHITE
22061802-68	CLD	0,24	LED COB-850lm-4000K-40°-CRI 92	9 W	WHITE

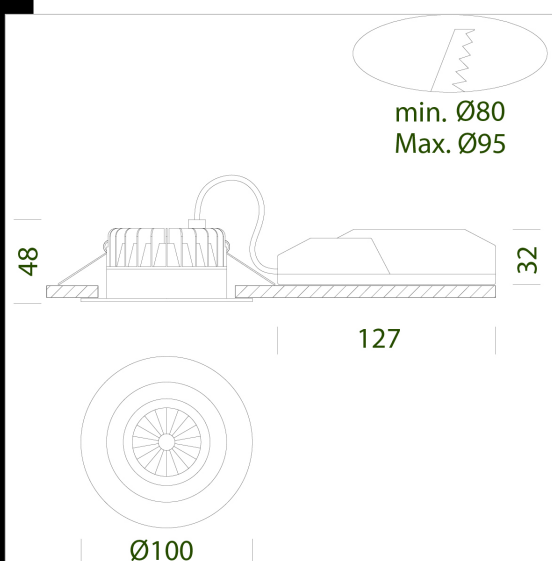

Download

- DXF 2D
- marte11.dxf
- Montaggi
- MARTE_4...12 rev7.pdf
- BIM
- Marte 11 - 20200224.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated