




Marte 4

Housing: Die-cast aluminium
 Reflector: In metalized polycarbonate to high rendering.
 Standards: manufactured pursuant to EN 60598-1-CEI 34.21 and with a degree of protection pursuant to EN 60529. Silicone rubber protection gasket compliant with French low-energy building standards (BBC)
 LED: 80% luminous flux maintenance at 80%: 50.000h (L80B20).
 Power factor 0.9
 Photobiological safety class: exempt group EN62471.
 Fitting hole: diameter 70/80mm

Download

DXF 2D
 - marte4.dxf
 Montaggi
 - MARTE_4...12 rev7.pdf

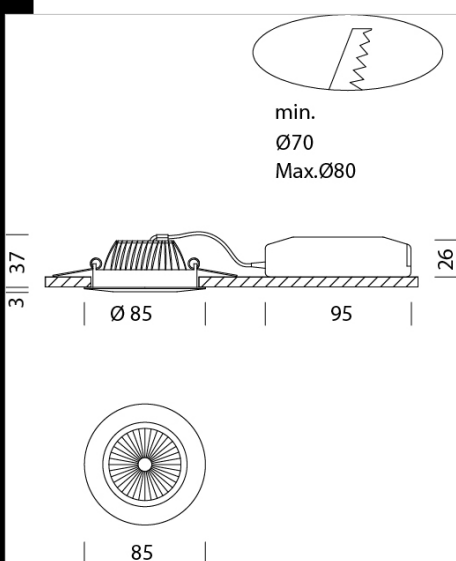

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22061810-00	CLD	0,18	LED COB-481lm-3000K-30°-CRI 92	5 W	WHITE
22061810-68	CLD	0,19	LED COB-515lm-4000K-30°-CRI 92	5 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated