


## Marte 5

Housing: Die-cast aluminium  
 Reflector: In metalized polycarbonate to high rendering.  
 Standards: manufactured pursuant to EN 60598-1-CEI 34.21 and with a degree of protection pursuant to EN 60529. Silicone rubber protection gasket compliant with French low-energy building standards (BBC).  
 LED: 80% luminous flux maintenance at 80%: 50.000h (L80B20).  
 Power factor 0.9  
 Photobiological safety class: exempt group EN62471.  
 Fitting hole: diameter 75/95mm



Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22061811-00	CLD	0,21	LED COB-642lm-3000K-30°-CRI 92	6 W	WHITE
22061811-68	CLD	0,22	LED COB-687lm-4000K-30°-CRI 92	6 W	WHITE

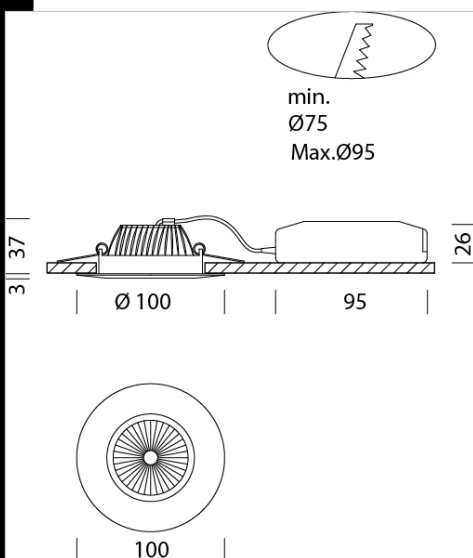

### Download

DXF 2D  
 - marte5.dxf  
 Montaggi  
 - MARTE\_4...12 rev7.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated