


## Marte 7

Housing: made of die-cast aluminium. Reflector: high-efficiency metallised polycarbonate. Regulations: Produced according to applicable EN60598 - CEI 34 - 21 standards, degree of protection according to EN 60529 standards  
 Power factor:  $\geq 0.9$   
 Luminous flux maintenance 80% 50000h (L80B20)  
 recessed  $\varnothing 75/95\text{mm}$   
 Photobiological safety class: exempt group EN62471.

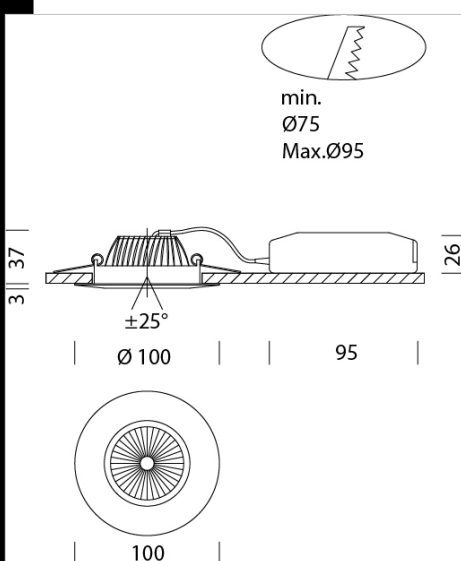


Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22061814-00	CLD	0,23	LED COB-642lm-3000K-30°-CRI 92	6 W	WHITE
22061814-68	CLD	0,23	LED COB-687lm-4000K-30°-CRI 92	6 W	WHITE

### Accessori



- EM Kit Q

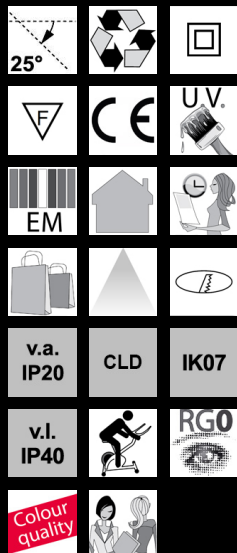

### Download

DXF 2D  
 - marte7.dxf

Montaggi  
 - MARTE\_4...12 rev7.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated