
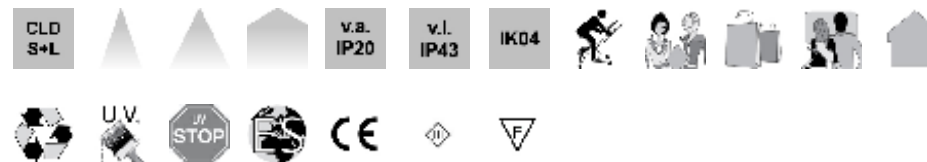


## Janus LED 3000K

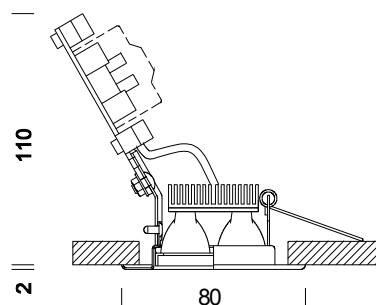

Code	Gear	Kg	Colour	Dimensions	lamp
22062111-00	CLD S+L	0.30	white	0x0x110 Ø80	POWERLED white-650lm-3000K-25°
22062134-00	CLD S+L	0.30	black	0x0x110 Ø80	POWERLED white-650lm-3000K-25°
22062172-00	CLD S+L	0.30	met. silver	0x0x110 Ø80	POWERLED white-650lm-3000K-25°
22062167-00	CLD S+L	0.30	chrome	0x0x110 Ø80	POWERLED white-650lm-3000K-25°
22062193-00	CLD S+L	0.30	shiny brass	0x0x110 Ø80	POWERLED white-650lm-3000K-25°
22062010-00	CLD S+L	0.30	white	0x0x110 Ø80	POWERLED white-540lm-3000K-10°
22062030-00	CLD S+L	0.30	black	0x0x110 Ø80	POWERLED white-540lm-3000K-10°
22062060-00	CLD S+L	0.30	chrome	0x0x110 Ø80	POWERLED white-540lm-3000K-10°
22062070-00	CLD S+L	0.30	met. silver	0x0x110 Ø80	POWERLED white-540lm-3000K-10°
22062090-00	CLD S+L	0.30	shiny brass	0x0x110 Ø80	POWERLED white-540lm-3000K-10°
22062011-00	CLD S+L	0.30	white	0x0x110 Ø80	POWERLED white-540lm-3000K-60°
22062031-00	CLD S+L	0.30	black	0x0x110 Ø80	POWERLED white-540lm-3000K-60°
22062061-00	CLD S+L	0.30	chrome	0x0x110 Ø80	POWERLED white-540lm-3000K-60°
22062071-00	CLD S+L	0.30	met. silver	0x0x110 Ø80	POWERLED white-540lm-3000K-60°
22062091-00	CLD S+L	0.30	shiny brass	0x0x110 Ø80	POWERLED white-540lm-3000K-60°
22066010-00	CLD S+L	0.30	white	0x0x110 Ø80	POWERLED white-450lm-3000K-10°
22066030-00	CLD S+L	0.30	black	0x0x110 Ø80	POWERLED white-450lm-3000K-10°
22066060-00	CLD S+L	0.30	chrome	0x0x110 Ø80	POWERLED white-450lm-3000K-10°
22066070-00	CLD S+L	0.30	met. silver	0x0x110 Ø80	POWERLED white-450lm-3000K-10°
22066090-00	CLD S+L	0.30	shiny brass	0x0x110 Ø80	POWERLED white-450lm-3000K-10°
22066011-00	CLD S+L	0.30	white	0x0x110 Ø80	POWERLED white-450lm-3000K-25°

Code	Gear	Kg	Colour	Dimensions	lamp
22066031-00	CLD S+L	0.30	black	0x0x110 Ø80	POWERLED white-450lm-3000K-25°
22066061-00	CLD S+L	0.30	chrome	0x0x110 Ø80	POWERLED white-450lm-3000K-25°
22066071-00	CLD S+L	0.30	met. silver	0x0x110 Ø80	POWERLED white-450lm-3000K-25°
22066091-00	CLD S+L	0.30	shiny brass	0x0x110 Ø80	POWERLED white-450lm-3000K-25°
22066012-00	CLD S+L	0.30	white	0x0x110 Ø80	POWERLED white-450lm-3000K-60°
22066032-00	CLD S+L	0.30	black	0x0x110 Ø80	POWERLED white-450lm-3000K-60°
22066062-00	CLD S+L	0.30	chrome	0x0x110 Ø80	POWERLED white-450lm-3000K-60°
22066072-00	CLD S+L	0.30	met. silver	0x0x110 Ø80	POWERLED white-450lm-3000K-60°
22066092-00	CLD S+L	0.30	shiny brass	0x0x110 Ø80	POWERLED white-450lm-3000K-60°

Small-size, adjustable-angle, recessed spotlights, made of steel.

Optionally these fixtures can be installed on shooks (step 100)

Housing: Steel, with a steel bracket holding the terminal block. Includes springs for recessed mounting.

Coating: Humidity-resistant acrylic-resin liquid paint, UV-stabilised,. A different galvanic finishing process is used for chromium-plated and polished brass versions.

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.

Complete with 1 module PowerLed 3X1.6w - 3000K - 450lm@500mA - 10/25/60°

Complete with 1 module PowerLed 3X2.5w - 3000K - 650lm@700mA - 10/25/60°

Separate transformer required (code 22090890-00 max 3 spot - 500mA)

Separate transformer DIM 1-10V required (code 22090834-00 max 2 spot - 500mA - 700mA)

Separate transformer DIM DALI required (code 22090837-1241 max 3 spot - 500mA)