



Download

DXF 2D
- antares.dxf

Montaggi
- ANTARES_IP54 rev2.pdf



Antares IP

Housing: Die-cast aluminium

Reflector: In metalized polycarbonate to high rendering.

Screen: in anti-glare matt plastic material.

Installation: equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings.

Painting: dust painted, using polyester epoxy paint to withstand UV rays.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection IP44 in accordance with standards EN60529.


Power factor: 0.9

Photobiological safety class: Exempt group.

Luminous flux maintenance 80%: 50.000h (L80B20).

On request: IP65 Silicone rubber protection gasket compliant with French low-energy building standards (BBC).

recessed Ø 70/85mm

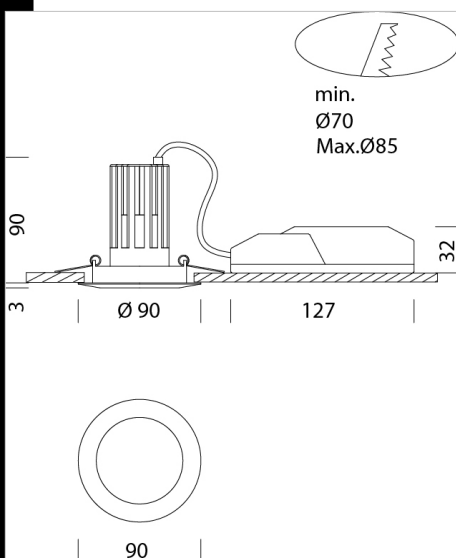

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22062410-00	CLD	0,38	LED COB-671lm-3000K-38°-CRI>90	10 W	WHITE
22062411-00	CLD	0,39	LED COB-743lm-4000K-38°-CRI>90	10 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated