


## Lem - LED 7W - DIMM - 220-240V

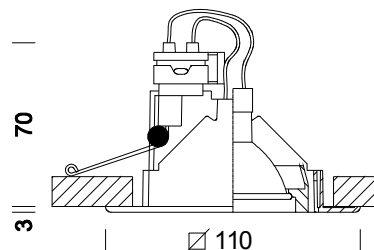

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22064810-00	CLD CELL	0.50	white	110x110x80	7	POWERLED 7W-450lm-3000K - 40°
22064830-00	CLD CELL	0.50	black	110x110x80	7	POWERLED 7W-450lm-3000K - 40°
22064860-00	CLD CELL	0.50	chrome	110x110x80	7	POWERLED 7W-450lm-3000K - 40°
22064880-00	CLD CELL	0.50	Gold	110x110x80	7	POWERLED 7W-450lm-3000K - 40°
22064890-00	CLD CELL	0.50	shiny brass	110x110x80	7	POWERLED 7W-450lm-3000K - 40°

These adjustable recessed spotlights, of moderate height, are ideal for installation in low false ceilings or display shelves, and are extremely easy to install.

Housing: Die-cast zamak, with a steel bracket holding the terminal block. Includes springs for recessed mounting.

Coating: Humidity-resistant acrylic-resin liquid paint, UV-stabilised, . A different galvanic finishing process is used for chromium-plated and polished brass versions.

Lampholder: Ceramic with silver-plated contacts.

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.