



Download
 DXF 2D
 - minisquare.dxf
 Montaggi
 - MINISQUARE-ISPOTCOMFORT
 rev2.pdf



Mini Square

Disano is proud to introduce a brand new range of recessed LED spotlights, with its compact dimensions, Minisquare fixtures are best for installation in small spaces, such as false ceilings, furnishings and window panels. Its LED sources allow remarkable energy savings and a really excellent light output.

Housing: made of die-cast aluminium.


Reflector: high-efficiency metallized polycarbonate.

LED: Luminous flux maintenance 80%: 50.000h (L80B20).

Power factor >0.9

Photobiological safety class: exempt group EN62471.

High light output (CRI 92) is guaranteed by specific anti-glare optics UGR>19

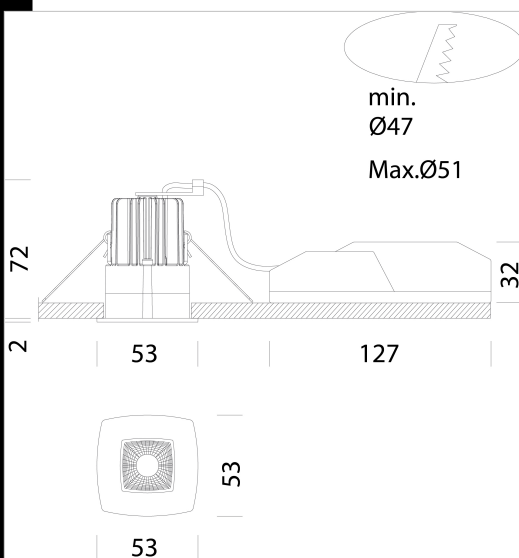

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22065210-00	CLD-DI	0,23	LED COB-900lm-3000K-48°-CRI 92	11 W	WHITE
22065211-00	CLD-DI	0,20	LED COB-984lm-4000K-48°-CRI 92	11 W	WHITE
22065210-1241	CLD-D-D	0,28	LED COB-900lm-3000K-48°-CRI 92	11 W	WHITE
22065211-1241	CLD-D-D	0,27	LED COB-984lm-4000K-48°-CRI 92	11 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated