

Jet 140 - IP44

Housing: fixed downlight in die cast aluminium complete with spring clips for recessed mounting
 Reflector: dark light optics in high gloss, anti-glare aluminium to optimise light efficiency.

Lens: in polycarbonate with high efficiency output and very low glare rate
 Installation: equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings.

Painting: dust painted, using polyester epoxy paint to withstand UV rays.

Standard supply: Includes adjustable steel bracket.


Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Power factor: 0.9

Photobiological safety class: Exempt group.

Luminous flux maintenance 80%: 50.000h (L80B20).

recessed Ø 120/138mm

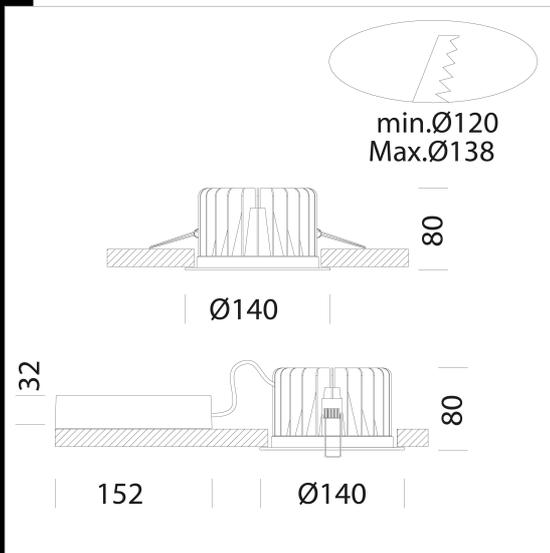

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22065610-39	CLD	0,64	LED COB-2379lm-3000K-CRI>90	23 W	WHITE
22065610-00	CLD	0,65	LED COB-2505lm-4000K-CRI>90	23 W	WHITE
22065610-3941	CLD CELL-D-D	0,65	LED COB-2379lm-3000K-CRI>90	23 W	WHITE
22065610-1241	CLD-D-D	0,68	LED COB-2505lm-4000K-CRI>90	23 W	WHITE

Accessori



- EM Kit Q



Download

DXF 2D
- jet140n.dxf

Montaggi
- JET IP44 rev3.pdf

BIM
- Jet 140 - IP44 - 20200716.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated