


Jet 180 - IP44

Housing: fixed downlight in die cast aluminium complete with spring clips for recessed mounting
 Reflector: dark light optics in high gloss, anti-glare aluminium to optimise light efficiency.
 Lens: in polycarbonate with high efficiency output and very low glare rate
 Installation: is equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings.
 Painting: dust painted, using polyester epoxy paint to withstand UV rays.
 Standard supply: Includes adjustable steel bracket.
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection IP44 in accordance with standards EN60529.
 Power factor: 0.9
 Photobiological safety class: Exempt group.
 Luminous flux maintenance 80%: 50.000h (L80B20).
 recessed Ø 158/178mm



Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22065614-39	CLD CELL	1,09	LED COB-4173lm-3000K-CRI 90	44 W	WHITE
22065614-00	CLD CELL	1,08	LED COB-4487lm-4000K-CRI 90	44 W	WHITE
22065614-3941	CLD CELL-D-D	1,15	LED COB-4173lm-3000K-CRI 90	44 W	WHITE
22065614-1241	CLD CELL-D-D	1,15	LED COB-4487lm-4000K-CRI 90	44 W	WHITE
22065614-0928	CLD CELL-E	1,15	LED COB-4173lm-3000K-CRI 90	44 W	WHITE
22065614-09	CLD CELL-E	1,15	LED COB-4487lm-4000K-CRI 90	44 W	WHITE
22065614-3957	CLD CELL-E	1,15	LED COB-4173lm-3000K-CRI 90	44 W	WHITE
22065614-31	CLD CELL-E	1,15	LED COB-4487lm-4000K-CRI 90	44 W	WHITE

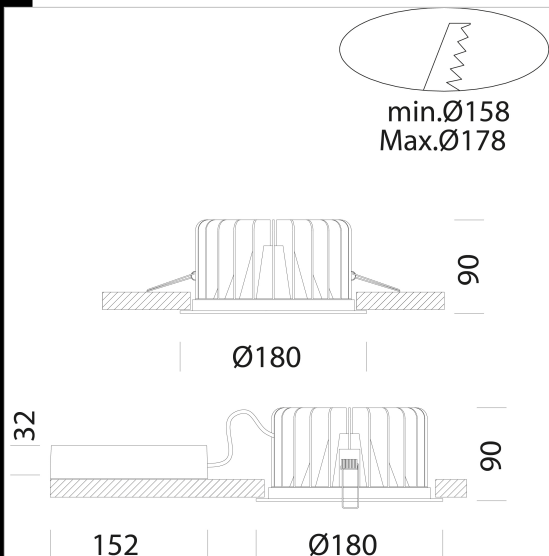

Download

- DXF 2D
- jet180n.dxf
- Montaggi
- JET IP44 rev3.pdf
- BIM
- Jet 180 - IP44 - 20200716.rar

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated