




Download

DXF 2D
- jet250n.dxf
Montaggi
- JET IP44 rev3.pdf
BIM
- Jet 250 - IP44 - 20200716.zip



Jet 250 - IP44

Housing: fixed downlight in die cast aluminium complete with spring clips for recessed mounting
Reflector: dark light optics in high gloss, anti-glare aluminium to optimise light efficiency.
Lens: in polycarbonate with high efficiency output and very low glare rate
Installation: equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings.
Painting: dust painted, using polyester epoxy paint to withstand UV rays.
Standard supply: Includes adjustable steel bracket.
Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection IP44 in accordance with standards EN60529.
Power factor: 0.9
Photobiological safety class: Exempt group.
Luminous flux maintenance 80%: 50.000h (L80B20).
recessed Ø 245mm

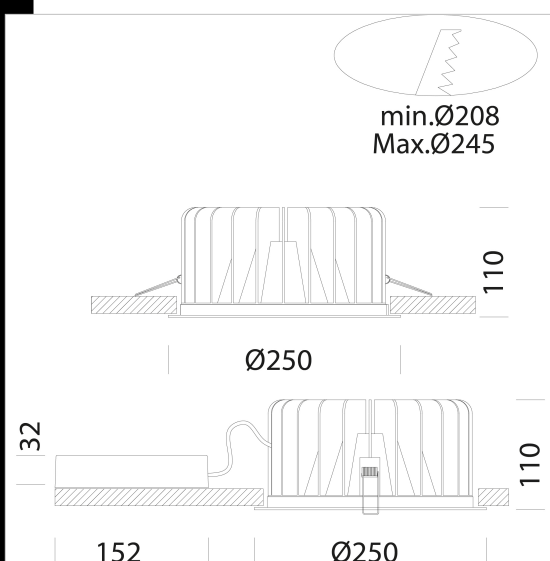

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22065615-39	CLD CELL	1,84	LED COB-5225lm-3000K-CRI 90	55 W	WHITE
22065615-00	CLD CELL	1,80	LED COB-5618lm-4000K-CRI 90	55 W	WHITE
22065615-3941	CLD CELL-D-D	1,80	LED COB-5225lm-3000K-CRI 90	55 W	WHITE
22065615-1241	CLD CELL-D-D	1,80	LED COB-5618lm-4000K-CRI 90	55 W	WHITE
22065615-0928	CLD CELL-E	1,80	LED COB-5225lm-3000K-CRI 90	55 W	WHITE
22065615-09	CLD CELL-E	2,31	LED COB-5618lm-4000K-CRI 90	55 W	WHITE
22065615-3957	CLD CELL-E	1,80	LED COB-5225lm-3000K-CRI 90	55 W	WHITE
22065615-31	CLD CELL-E	1,80	LED COB-5618lm-4000K-CRI 90	55 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated