


## Jet 250 - IP65



Housing: fixed downlight in die cast aluminium complete with spring clips for recessed mounting  
 Reflector: dark light optics in high gloss, anti-glare aluminium to optimise light efficiency.  
 Installation: equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings.  
 Painting: dust painted, using polyester epoxy paint to withstand UV rays.  
 Standard supply: Includes adjustable steel bracket.  
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection IP65 in accordance with standards EN60529.  
 Power factor: 0.9  
 Photobiological safety class: Exempt group.  
 Luminous flux maintenance 80%: 50.000h (L80B20).  
 recessed Ø 208/248mm

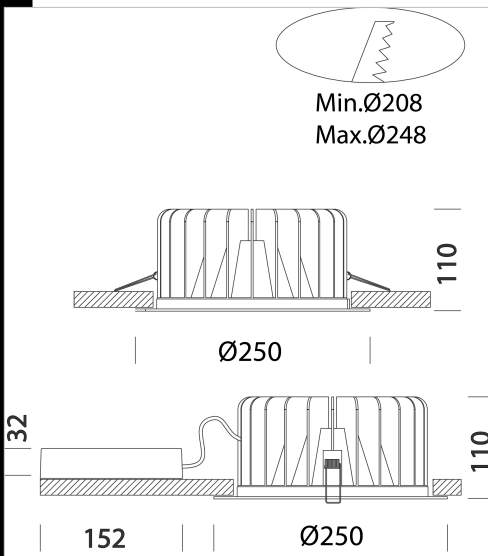

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22065618-39	CLD CELL	2,37	LED COB-5193lm-3000K-CRI 80	50 W	WHITE
22065618-00	CLD CELL	2,37	LED COB-5584lm-4000K-CRI 80	50 W	WHITE
22065618-3941	CLD CELL-D-D	2,40	LED COB-5193lm-3000K-CRI 80	50 W	WHITE
22065618-1241	CLD CELL-D-D	2,40	LED COB-5584lm-4000K-CRI 80	50 W	WHITE
22065618-0928	CLD CELL-E	3,78	LED COB-5193lm-3000K-CRI 80	50 W	WHITE
22065618-09	CLD CELL-E	3,78	LED COB-5584lm-4000K-CRI 80	50 W	WHITE
22065618-3957	CLD CELL-E	3,78	LED COB-5193lm-3000K-CRI 80	50 W	WHITE
22065618-31	CLD CELL-E	3,58	LED COB-5584lm-4000K-CRI 80	50 W	WHITE



### Download

DXF 2D  
 - jet250.dxf

Montaggi  
 - JET IP65 rev5.pdf

BIM  
 - JET 250 - IP65 - 20200716.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated