



#### Download

DXF 2D  
- Jet130n.dxf

Montaggi  
- JET IP44 rev3.pdf

BIM  
- Jet Q 130 - IP44 - 20200716.zip



#### Jet Q 130 - IP44

Housing: fixed downlight in die cast aluminium complete with spring clips for recessed mounting

Reflector: dark light optics in high gloss, anti-glare aluminium to optimise light efficiency.

Lens: in polycarbonate with high efficiency output and very low glare rate

Installation: is equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings.

Painting: dust painted, using polyester epoxy paint to withstand UV rays.

Standard supply: Includes adjustable steel bracket.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34


–21. Degree of protection IP44 in accordance with standards EN60529.

Power factor: 0.9

Photobiological safety class: Exempt group.

Luminous flux maintenance 80%: 50.000h (L80B20).

recessed Ø 120/128mm

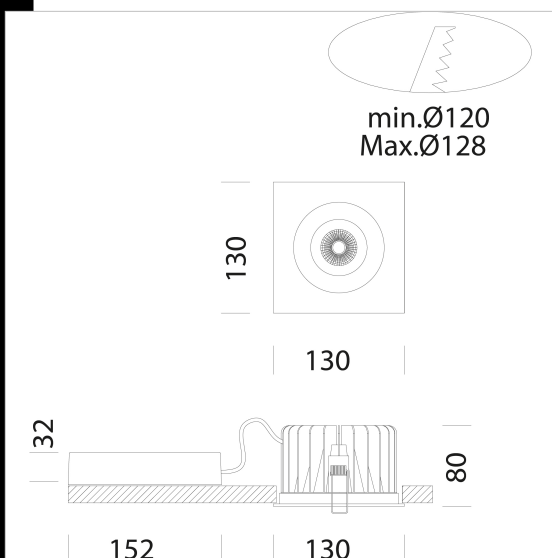

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22065710-39	CLD	0,65	LED COB-2379lm-3000K-CRI>90	23 W	WHITE
22065710-00	CLD	0,66	LED COB-2505lm-4000K-CRI>90	23 W	WHITE
22065710-3941	CLD-D-D	0,75	LED COB-2379lm-3000K-CRI>90	23 W	WHITE
22065710-1241	CLD-D-D	0,75	LED COB-2505lm-4000K-CRI>90	23 W	WHITE

#### Accessori



- EM Kit Q

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated