

Housing: fixed downlight in die cast aluminium complete with spring clips for recessed mounting Reflector: in matt, anti-glare aluminium to optimise light efficiency. Screen: in anti-glare matt plastic material. Installation: equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings.

Painting: dust painted, using polyester epoxy paint to withstand UV rays.


Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection IP44 in accordance with standards EN60529.

Power factor: 0.9

Photobiological safety class: Exempt group.

Luminous flux maintenance 80%: 50.000h (L80B20).

recessed Ø 120/138mm

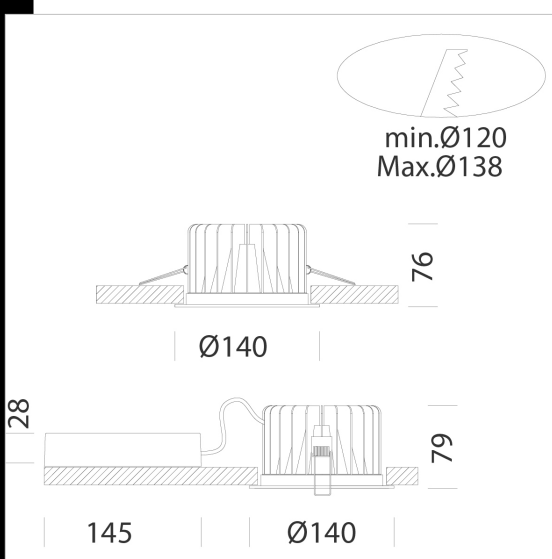

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22065910-00	CLD CELL	0.63	LED COB-2079lm-4000K-CRI 80	23 W	WHITE
22065910-09	CLD CELL-E	0.70	LED COB-2079lm-4000K-CRI 80	23 W	WHITE
22065910-1241	CLD CELL-D-D	0.69	LED COB-2079lm-4000K-CRI 80	23 W	WHITE
22065910-39	CLD CELL	0.63	LED COB-1933lm-3000K-CRI 80	23 W	WHITE
22065910-0928	CLD CELL-E	0.70	LED COB-1933lm-3000K-CRI 80	23 W	WHITE
22065910-3941	CLD CELL-D-D	0.68	LED COB-1933lm-3000K-CRI 80	23 W	WHITE

04/02/2021