
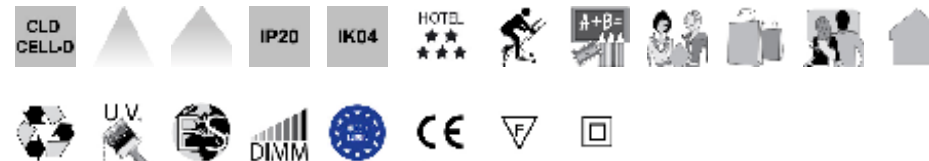


Sirio - LED 7W - 220-240V - DIMM - Home

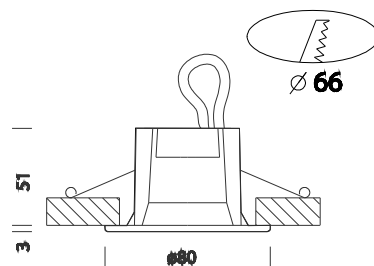

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22066112-00	CLD CELL-D	0.20	white	0x0x72 Ø80	7	POWERLED 7W-GU10-450lm-3000K - 25°
22066172-00	CLD CELL-D	0.20	met. silver	0x0x72 Ø80	7	POWERLED 7W-GU10-450lm-3000K - 25°
22066132-00	CLD CELL-D	0.20	black	0x0x72 Ø80	7	POWERLED 7W-GU10-450lm-3000K - 25°
22066162-00	CLD CELL-D	0.20	chrome	0x0x72 Ø80	7	POWERLED 7W-GU10-450lm-3000K - 25°
22066182-00	CLD CELL-D	0.20	Gold	0x0x72 Ø80	7	POWERLED 7W-GU10-450lm-3000K - 25°
22066192-00	CLD CELL-D	0.20	shiny brass	0x0x72 Ø80	7	POWERLED 7W-GU10-450lm-3000K - 25°
22066114-00	CLD CELL-D	0.20	white	0x0x72 Ø80	7	POWERLED 7W-GU10-450lm-3000K - 40°
22066174-00	CLD CELL-D	0.20	met. silver	0x0x72 Ø80	7	POWERLED 7W-GU10-450lm-3000K - 40°
22066134-00	CLD CELL-D	0.20	black	0x0x72 Ø80	7	POWERLED 7W-GU10-450lm-3000K - 40°
22066164-00	CLD CELL-D	0.20	chrome	0x0x72 Ø80	7	POWERLED 7W-GU10-450lm-3000K - 40°
22066184-00	CLD CELL-D	0.20	Gold	0x0x72 Ø80	7	POWERLED 7W-GU10-450lm-3000K - 40°
22066194-00	CLD CELL-D	0.20	shiny brass	0x0x72 Ø80	7	POWERLED 7W-GU10-450lm-3000K - 40°

Housing: Die-cast zamak.

Coating: Humidity-resistant acrylic-resin liquid paint, UV-stabilised, . A different galvanic finishing process is used for chromium-plated and polished brass versions.

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.

LED 7W - 230V - Gu10 - 450lm - 3000k - CRI 80 - 40000h