


Eco Sirio

Housing: Die-cast zamak.
 Coating: Humidity-resistant acrylic-resin liquid paint, UV-stabilised. A different galvanic finishing process is used for chromium-plated and polished brass versions.
 Regulations: Manufactured in accordance with standards EN60598 – 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.
 Power factor: 0.8
 Luminous flux maintenance 70% 25000h (L70B50)
 Photobiological safety class: Exempt group.



Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22066114-00	CLD CELL	0.23	LED SMD-500lm-3000K-38°-CRI 80	6 W	BIANCO
22066174-00	CLD CELL	0.23	LED SMD-500lm-3000K-38°-CRI 80	6 W	ARGENTO
22066134-00	CLD CELL	0.23	LED SMD-500lm-3000K-38°-CRI 80	6 W	NERO
22066164-00	CLD CELL	0.23	LED SMD-500lm-3000K-38°-CRI 80	6 W	CROMATO
22066184-00	CLD CELL	0.23	LED SMD-500lm-3000K-38°-CRI 80	6 W	ORO
22066194-00	CLD CELL	0.22	LED SMD-500lm-3000K-38°-CRI 80	6 W	ORO

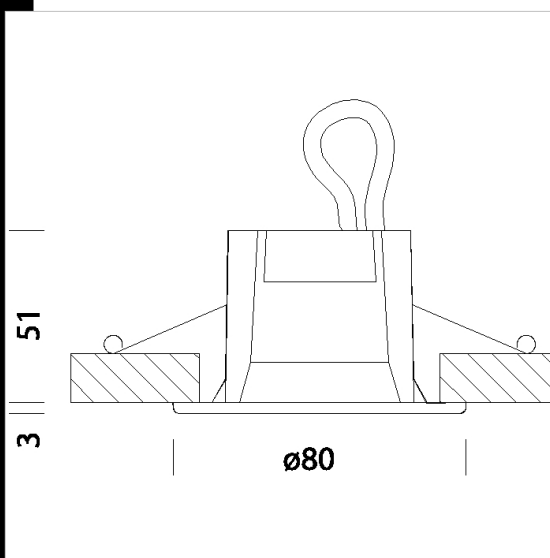

Download

DXF 2D
 - sirio.dxf

Montaggi
 - ECO_SIRIO rev0.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated