
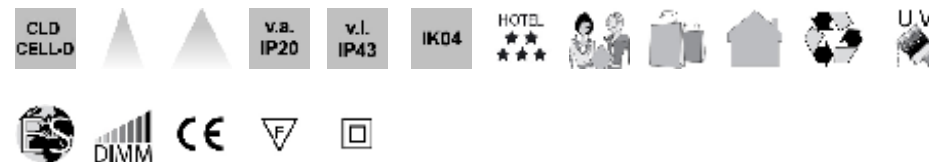


Deimos LED 7W - 220-240V DIMM

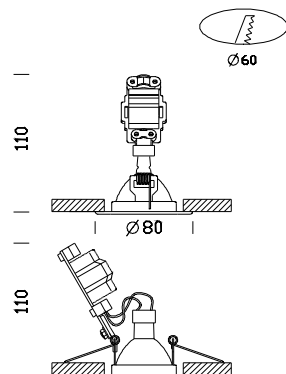

| Code | Gear | Kg | Colour | Dimensions | W Tot | lamp |
|-------------|------------|------|-------------|-------------|-------|------------------------------------|
| 22066214-00 | CLD CELL-D | 0.20 | white | 0x0x110 Ø80 | 7 | POWERLED 7W-GU10-450lm-3000K - 25° |
| 22066274-00 | CLD CELL-D | 0.20 | met. silver | 0x0x110 Ø80 | 7 | POWERLED 7W-GU10-450lm-3000K - 25° |
| 22066234-00 | CLD CELL-D | 0.20 | black | 0x0x110 Ø80 | 7 | POWERLED 7W-GU10-450lm-3000K - 25° |
| 22066264-00 | CLD CELL-D | 0.20 | chrome | 0x0x110 Ø80 | 7 | POWERLED 7W-GU10-450lm-3000K - 25° |
| 22066284-00 | CLD CELL-D | 0.20 | shiny brass | 0x0x110 Ø80 | 7 | POWERLED 7W-GU10-450lm-3000K - 25° |
| 22066215-00 | CLD CELL-D | 0.20 | white | 0x0x110 Ø80 | 7 | POWERLED 7W-450lm-3000K - 40° |
| 22066275-00 | CLD CELL-D | 0.20 | met. silver | 0x0x110 Ø80 | 7 | POWERLED 7W-450lm-3000K - 40° |
| 22066235-00 | CLD CELL-D | 0.20 | black | 0x0x110 Ø80 | 7 | POWERLED 7W-450lm-3000K - 40° |
| 22066265-00 | CLD CELL-D | 0.20 | chrome | 0x0x110 Ø80 | 7 | POWERLED 7W-450lm-3000K - 40° |
| 22066285-00 | CLD CELL-D | 0.20 | shiny brass | 0x0x110 Ø80 | 7 | POWERLED 7W-450lm-3000K - 40° |

These small-size, have the advantage of requiring very basic maintenance. Very good value.

Optionally these fixtures can be installed on shooks (step 100)

Housing: Made of sheet steel.

Lampholder: Ceramic with silver-plated contacts.

Coating: Humidity-resistant acrylic-resin liquid paint, UV-stabilised,. A different galvanic finishing process is used for chromium-plated and polished brass versions.

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.

LED 7W - 230V - Gu10 - 450lm - 3000k - CRI 80 - 40000h