

Sun T - 4000K - Energy saving

New adjustable recessed spotlights for stores, homes and accommodation facilities. These new spotlights meet the multiple needs of lighting designers who have completely changed the way they light and decorate interiors. Nowadays the primary goal is to obtain the best visual comfort, giving light different meanings based on the type of space in which light is used.

In retail units, from big shopping centres to small shops, light is the central element around which the interior space is arranged and it is used to improve the display of goods and create tailored lighting systems to make the brand always recognisable.

In the accommodation and leisure facilities (hotels, bars, restaurants), light is an important element to develop a tailored and well-recognisable style.

This is why we created Sun

Housing: made in aluminum adjustable with springs.

Specific optical anti-glare for improved comfort.

Lens: injection moulded PMMA with high efficiency output and very low glare rate

Coating: Power-coated with a UV-resistant polyester paint.

Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.

Dimmable with IGBT dimmer dimming devices (for example, with halogen lights DIM IGBT)


Heat sink: passive, pressed in die-cast aluminium with lateral outputs allowing for greater circulation of heat to ensure an extended life of the LED module.

Power factor: 0.9

Luminous flux maintenance 80%: 50000h (L80B20)

Photobiological safety class: exempt group EN62471.

recessed Ø 65/85mm

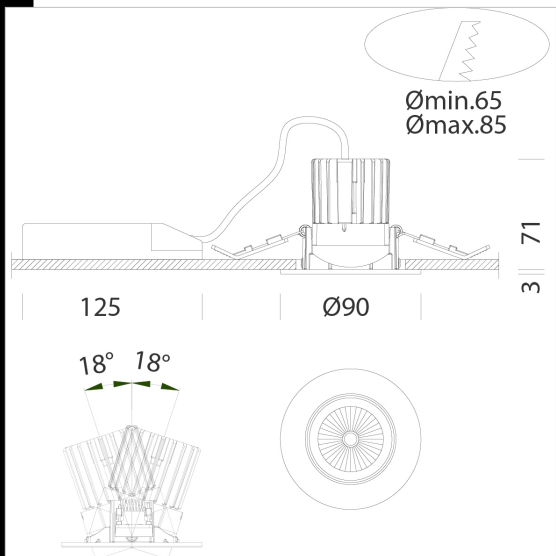

Download

DXF 2D
- sun18.dxf
- sun18.dxf

Montaggi
- SUN T-Q rev2.pdf

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22066302-00	CLD CELL-DI	0,32	LED COB-1100lm-4000K-25°-CRI 91	10 W	WHITE
22066316-00	CLD CELL-DI	0,29	LED COB-1100lm-4000K-40°-CRI 91	10 W	WHITE
22066317-00	CLD CELL-DI	0,30	LED COB-1050lm-4000K-60°-CRI 91	10 W	WHITE
22066303-00	CLD CELL-DI	0,30	LED COB-1100lm-4000K-25°-CRI 91	10 W	SILVER
22066363-00	CLD CELL-DI	0,32	LED COB-1100lm-4000K-40°-CRI 91	10 W	SILVER
22066364-00	CLD CELL-DI	0,37	LED COB-1050lm-4000K-60°-CRI 91	10 W	SILVER
22066302-12	CLD CELL-D	0,32	LED COB-1100lm-4000K-25°-CRI 91	9 W	WHITE
22066316-12	CLD CELL-D	0,30	LED COB-1100lm-4000K-40°-CRI 91	9 W	WHITE
22066317-12	CLD CELL-D	0,30	LED COB-1050lm-4000K-60°-CRI 91	10 W	WHITE
22066303-12	CLD CELL-D	0,30	LED COB-1100lm-4000K-25°-CRI 91	9 W	SILVER
22066363-12	CLD CELL-D	0,30	LED COB-1100lm-4000K-40°-CRI 91	9 W	SILVER
22066364-12	CLD CELL-D	0,30	LED COB-1050lm-4000K-60°-CRI 91	9 W	SILVER
22066302-1241	CLD CELL-D-D	0,30	LED COB-1100lm-4000K-25°-CRI 91	9 W	WHITE
22066316-1241	CLD CELL-D-D	0,30	LED COB-1100lm-4000K-40°-CRI 91	9 W	WHITE
22066317-1241	CLD CELL-D-D	0,32	LED COB-1050lm-4000K-60°-CRI 91	10 W	WHITE
22066303-1241	CLD CELL-D-D	0,30	LED COB-1100lm-4000K-25°-CRI 91	9 W	SILVER
22066363-1241	CLD CELL-D-D	0,30	LED COB-1100lm-4000K-40°-CRI 91	9 W	SILVER
22066364-1241	CLD CELL-D-D	0,30	LED COB-1050lm-4000K-60°-CRI 91	9 W	SILVER
22066302-09	CLD CELL-DI-E	0,70	LED COB-1100lm-4000K-25°-CRI 91	9 W	WHITE
22066316-09	CLD CELL-DI-E	0,70	LED COB-1100lm-4000K-40°-CRI 91	9 W	WHITE
22066317-09	CLD CELL-DI-E	0,70	LED COB-1050lm-4000K-60°-CRI 91	9 W	WHITE
22066303-09	CLD CELL-DI-E	0,70	LED COB-1100lm-4000K-25°-CRI 91	9 W	SILVER
22066363-09	CLD CELL-DI-E	0,70	LED COB-1100lm-4000K-40°-CRI 91	9 W	SILVER
22066364-09	CLD CELL-DI-E	0,70	LED COB-1050lm-4000K-60°-CRI 91	9 W	SILVER
22066302-31	CLD CELL-DI-E	0,70	LED COB-1100lm-4000K-25°-CRI 91	9 W	WHITE
22066316-31	CLD CELL-DI-E	0,70	LED COB-1100lm-4000K-40°-CRI 91	9 W	WHITE
22066303-31	CLD CELL-DI-E	0,70	LED COB-1100lm-4000K-25°-CRI 91	9 W	SILVER
22066317-31	CLD CELL-DI-E	0,70	LED COB-1050lm-4000K-60°-CRI 91	9 W	WHITE
22066363-31	CLD CELL-DI-E	0,70	LED COB-1100lm-4000K-40°-CRI 91	9 W	SILVER
22066364-31	CLD CELL-DI-E	0,70	LED COB-1050lm-4000K-60°-CRI 91	9 W	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated