

Sun T - DIMM CRI97

New adjustable recessed spotlights for stores, homes and accommodation facilities. These new spotlights meet the multiple needs of lighting designers who have completely changed the way they light and decorate interiors. Nowadays the primary goal is to obtain the best visual comfort, giving light different meanings based on the type of space in which light is used.

In retail units, from big shopping centres to small shops, light is the central element around which the interior space is arranged and it is used to improve the display of goods and create tailored lighting systems to make the brand always recognisable.

In the accommodation and leisure facilities (hotels, bars, restaurants), light is an important element to develop a tailored and well-recognisable style.

This is why we created Sun

Housing: made in aluminum adjustable with springs.

Specific optical anti-glare for improved comfort.

Lens: injection moulded PMMA with high efficiency output and very low glare rate

Coating: Power-coated with a UV-resistant polyester paint.

Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.

- Compatible with the most common dimming devices (for example, with halogen lights DIM IGBT)

Heat sink: passive, pressed in die-cast aluminium with lateral outputs allowing for greater circulation of heat to ensure an extended life of the LED module.


LED 3000K - 800lm - 12.5W - 38/50° - CRI97

Power factor: 0.9

Luminous flux maintenance 70% 50000h (L70B50)

Photobiological safety class: exempt group EN62471.

Lower lamp wattages means greater economy, more than 80% saving recessed Ø 65/80mm

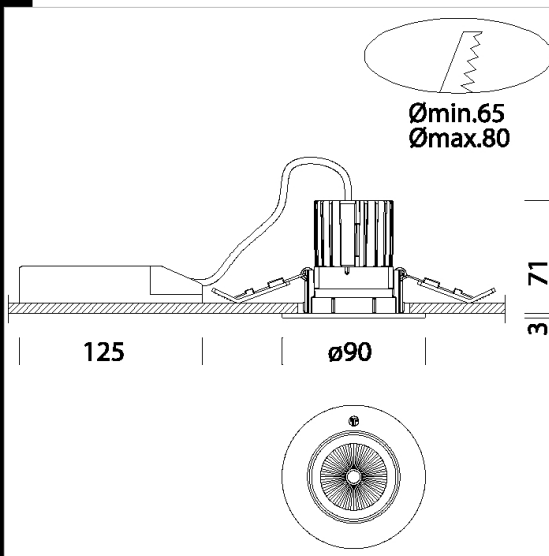

Code	Gear	Kg	Watt	Base	Lamps	Colour
22066314-00	CLD CELL-DI	0,35	LED white 12,5W	-	800lm-3000K - 38°-CRI 97	WHITE
22066314-12	CLD CELL-D	0,35	LED white 12,5W	-	800lm-3000K - 38°-CRI 97	WHITE
22066315-12	CLD CELL-D	0,37	LED white 12,5W	-	800lm-3000K - 50°-CRI 97	WHITE
22066315-00	CLD CELL-DI	0,30	LED white 12,5W	-	800lm-3000K - 50°-CRI 97	WHITE

- HOTEL
- CE
- UV
- A+B=
- DIMM
- Colour quality
- IK04
- v.l. IP40
- CLD CELL-D
- v.a. IP20
- RG0
- 20°

Download
DXF 2D
- sunt.dxf
Montaggi
- sun.pdf