



iSpot 2

The ideal retrofit of existing ISPOT spotlights, it represents the technological benchmark of recessed spotlights. The main advantages of this latest generation product are energy-efficiency, great flexible use and superior lighting quality.

With latest generation LEDs you can save up to 80% of energy compared to old products, plus a service life that can reach up to 50,000 hours guaranteeing an excellent luminous flux. The high quality of these spotlights is also guaranteed by specific colour temperatures (3000K - 4000K) and anti-glare optics.

Housing: made in aluminum adjustable with springs.

Specific optical anti-glare for improved comfort.

Coating: Power-coated with a UV-resistant polyester paint.

Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.

Dimmable with IGBT dimmer dimming devices (for example, with halogen lights DIM IGBT)


Can be installed in a hole at least $\varnothing 75\text{mm}$ up to $\varnothing 85$

Power factor: ≥ 0.9

Luminous flux maintenance 80%: 50.000h (L80B20).

Photobiological safety class: exempt group EN62471.

Lower lamp wattages means greater economy, more than 80% saving

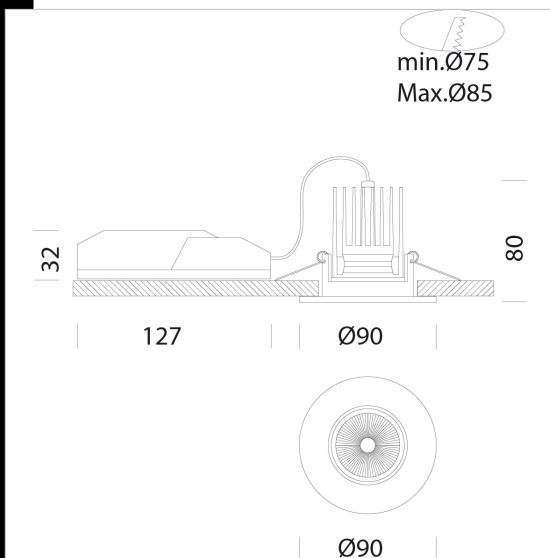

Download

DXF 2D
- isp22.dxf

Montaggi
- LOWGLARE FENIX :ISPOT1-2-3
rev0.pdf

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22067210-00	CLD CELL-DI	0,30	LED COB-957lm-3000K-38°-CRI 92	10 W	WHITE
22067230-00	CLD CELL-DI	0,38	LED COB-957lm-3000K-38°-CRI 92	10 W	BLACK
22067260-00	CLD CELL-DI	0,35	LED COB-957lm-3000K-38°-CRI 92	10 W	CHROME
22067270-00	CLD CELL-DI	0,30	LED COB-957lm-3000K-38°-CRI 92	10 W	SILVER
22067211-00	CLD CELL-DI	0,35	LED COB-990lm-4000K-38°-CRI 92	10 W	WHITE
22067231-00	CLD CELL-DI	0,36	LED COB-990lm-4000K-38°-CRI 92	10 W	BLACK
22067261-00	CLD CELL-DI	0,37	LED COB-990lm-4000K-38°-CRI 92	10 W	CHROME
22067271-00	CLD CELL-DI	0,35	LED COB-990lm-4000K-38°-CRI 92	10 W	SILVER
22067210-1241	CLD CELL-D-D	0,33	LED COB-957lm-3000K-38°-CRI 92	13 W	WHITE
22067230-1241	CLD CELL-D-D	0,31	LED COB-957lm-3000K-38°-CRI 92	10 W	BLACK
22067260-1241	CLD CELL-D-D	0,33	LED COB-957lm-3000K-38°-CRI 92	10 W	CHROME
22067270-1241	CLD CELL-D-D	0,33	LED COB-957lm-3000K-38°-CRI 92	10 W	SILVER
22067211-1241	CLD CELL-D-D	0,30	LED COB-990lm-4000K-38°-CRI 92	10 W	WHITE
22067231-1241	CLD CELL-D-D	0,30	LED COB-990lm-4000K-38°-CRI 92	12 W	BLACK
22067261-1241	CLD CELL-D-D	0,33	LED COB-990lm-4000K-38°-CRI 92	10 W	CHROME
22067271-1241	CLD CELL-D-D	0,32	LED COB-990lm-4000K-38°-CRI 92	12 W	SILVER
22067210-09	CLD CELL-DI-E	0,86	LED COB-957lm-3000K-38°-CRI 92	10 W	WHITE
22067230-09	CLD CELL-DI-E	0,85	LED COB-957lm-3000K-38°-CRI 92	10 W	BLACK
22067260-09	CLD CELL-DI-E	0,85	LED COB-957lm-3000K-38°-CRI 92	10 W	CHROME
22067270-09	CLD CELL-DI-E	0,85	LED COB-957lm-3000K-38°-CRI 92	10 W	SILVER
22067211-09	CLD CELL-DI-E	0,86	LED COB-990lm-4000K-38°-CRI 92	10 W	WHITE
22067231-09	CLD CELL-DI-E	0,79	LED COB-990lm-4000K-38°-CRI 92	10 W	BLACK
22067261-09	CLD CELL-DI-E	0,85	LED COB-990lm-4000K-38°-CRI 92	10 W	CHROME
22067271-09	CLD CELL-DI-E	0,85	LED COB-990lm-4000K-38°-CRI 92	10 W	SILVER
22067210-31	CLD CELL-DI-E	0,85	LED COB-957lm-3000K-38°-CRI 92	10 W	WHITE
22067230-31	CLD CELL-DI-E	0,85	LED COB-957lm-3000K-38°-CRI 92	10 W	BLACK
22067260-31	CLD CELL-DI-E	0,85	LED COB-957lm-3000K-38°-CRI 92	10 W	CHROME
22067270-31	CLD CELL-DI-E	0,85	LED COB-957lm-3000K-38°-CRI 92	10 W	SILVER
22067211-31	CLD CELL-DI-E	0,85	LED COB-990lm-4000K-38°-CRI 92	10 W	WHITE
22067231-31	CLD CELL-DI-E	0,85	LED COB-990lm-4000K-38°-CRI 92	10 W	BLACK
22067261-31	CLD CELL-DI-E	0,85	LED COB-990lm-4000K-38°-CRI 92	10 W	CHROME
22067271-31	CLD CELL-DI-E	0,85	LED COB-990lm-4000K-38°-CRI 92	10 W	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Accessori



- Protective grig

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated