



### Download

DXF 2D  
- isp11.dxf

Montaggi  
- LOWGLARE FENIX -ISPOT1-2-3  
rev0.pdf



## iSpot 1

The ideal retrofit of existing ISPOT spotlights, it represents the technological benchmark of recessed spotlights. The main advantages of this latest generation product are energy-efficiency, great flexible use and superior lighting quality.

With latest generation LEDs you can save up to 80% of energy compared to old products, plus a service life that can reach up to 50,000 hours guaranteeing an excellent luminous flux. The high quality of these spotlights is also guaranteed by specific colour temperatures (3000K - 4000K) and anti-glare optics.

Housing: made in aluminum adjustable with springs.

Specific optical anti-glare for improved comfort.

Coating: Power-coated with a UV-resistant polyester paint.

Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.

Dimmable with IGBT dimmer dimming devices (for example, with halogen lights DIM IGBT)


Can be installed in a hole at least Ø75 mm up to Ø 105

Power factor: >= 0.9

Luminous flux maintenance 80%: 50.000h (L80B20).

Photobiological safety class: exempt group EN62471.

Lower lamp wattages means greater economy, more than 80% saving

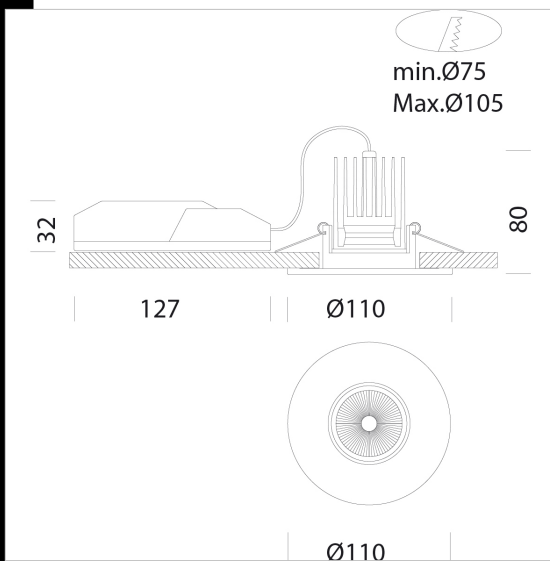

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22067310-00	CLD	0,35	LED COB-957lm-3000K-38°-CRI 92	10 W	WHITE
22067330-00	CLD	0,42	LED COB-957lm-3000K-38°-CRI 92	10 W	BLACK
22067370-00	CLD	0,35	LED COB-957lm-3000K-38°-CRI 92	10 W	SILVER
22067311-00	CLD	0,40	LED COB-990lm-4000K-38°-CRI 92	10 W	WHITE
22067331-00	CLD	0,35	LED COB-990lm-4000K-38°-CRI 92	10 W	BLACK
22067371-00	CLD	0,40	LED COB-990lm-4000K-38°-CRI 92	10 W	SILVER

### Accessori



- EM Kit Q



- Honeycomb screen - iSpot



- Protective grig

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated