


**Download**

DXF 2D  
- swing.dxf  
Montaggi  
- SWING rev2.pdf



**Swing LED**

Housing: made from aluminium, adjustable.  
Coating: Power-coated with a UV-resistant polyester paint.  
Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.  
Power factor:  $\geq 0.8$   
Luminous flux maintenance 70% 25000h (L70B50)  
Photobiological safety class: exempt group EN62471.  
recessed  $\varnothing$  78/86mm

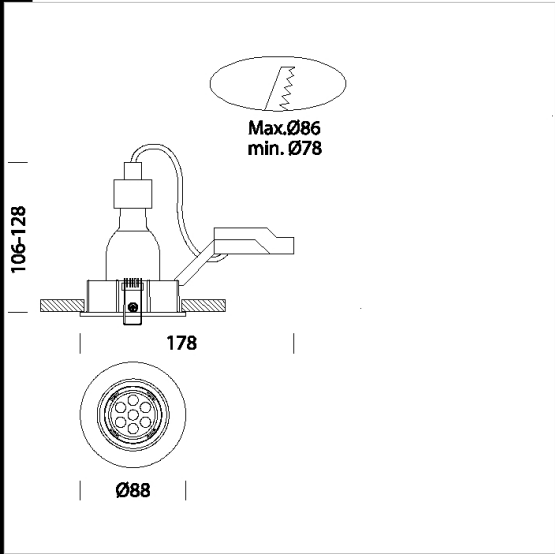

| Code        | Gear   | Kg   | Lumen Output-K-CRI             | WTot | Colour |
|-------------|--------|------|--------------------------------|------|--------|
| 22068210-00 | CLD    | 0,25 | LED SMD-500lm-3000K-38°-CRI 80 | 6 W  | WHITE  |
| 22068270-00 | CLD    | 0,25 | LED SMD-500lm-3000K-38°-CRI 80 | 6 W  | WHITE  |
| 22068215-00 | CLD    | 0,24 | LED SMD-535lm-4000K-38°-CRI 80 | 6 W  | WHITE  |
| 22068275-00 | CLD    | 0,25 | LED SMD-535lm-4000K-38°-CRI 80 | 6 W  | WHITE  |
| 22068211-00 | CLD-DI | 0,25 | LED SMD-500lm-3000K-38°-CRI 80 | 6 W  | WHITE  |
| 22068271-00 | CLD-DI | 0,27 | LED SMD-500lm-3000K-38°-CRI 80 | 6 W  | WHITE  |
| 22068217-00 | CLD-DI | 0,25 | LED SMD-535lm-4000K-38°-CRI 80 | 6 W  | WHITE  |
| 22068277-00 | CLD-DI | 0,27 | LED SMD-535lm-4000K-38°-CRI 80 | 6 W  | WHITE  |
| 22068214-00 | CLD    | 0,70 | LED SMD-800lm-3000K-38°-CRI 80 | 9 W  | WHITE  |
| 22068274-00 | CLD    | 0,25 | LED SMD-800lm-3000K-38°-CRI 80 | 9 W  | WHITE  |
| 22068216-00 | CLD    | 0,23 | LED SMD-856lm-4000K-38°-CRI 80 | 9 W  | WHITE  |
| 22068276-00 | CLD    | 0,25 | LED SMD-856lm-4000K-38°-CRI 80 | 9 W  | WHITE  |

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated