




Download
DXF 2D
- kosmos.dxf



Sirio

Housing: fixed downlight in die cast aluminium complete with spring clips for recessed mounting. Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529. LED: Luminous flux maintenance L70B50: 25.000h.

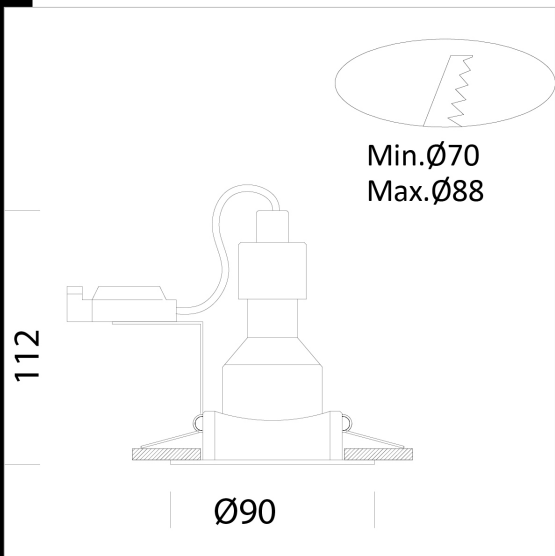

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22068715-00	CLD	0,18	LED SMD-800lm-3000K-38°-CRI 80	9 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated