

Download

DXF 2D
- boxy1.dxf

3DS
- fosnova_boxy_small.3ds


3DM
- fosnova_boxy_small.3dm

Montaggi
- BOXY rev7.pdf



Boxy small

Housing : in aluminium.
Diffuseur: In polycarbonate
Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
LED 2580lm - 3000/4000K - CRI 80
Power factor: >0,95
Luminous flux maintenance 80%: 50000h (L80B20)
Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

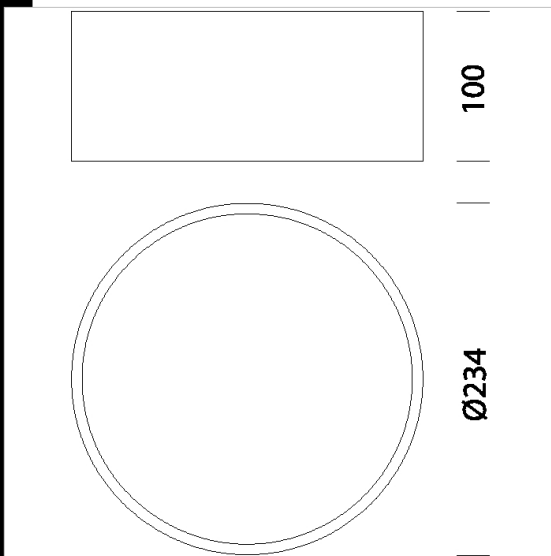

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22069110-00	CLD CELL	1.70	LED-2838lm-4000K-CRI 80	29 W	WHITE
22069112-00	CLD CELL	1.80	LED-2554lm-3000K-CRI 80	29 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated