


Download

DXF 2D
- boxy2.dxf

3DS
- fosnova_boxy_big.3ds

3DM
- fosnova_boxy_big.3dm

Montaggi
- BOXY REV9.pdf

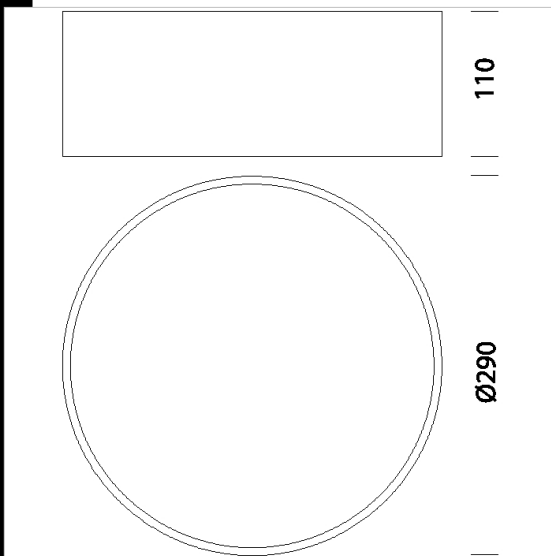

Boxy big

Housing : in aluminium.
Diffuseur: In polycarbonate
Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
LED 3200lm - 3000/4000K - CRI 80
Power factor: >0,95
Luminous flux maintenance 80%: 50000h (L80B20)
Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22069111-00	CLD	2,70	LED-3520lm-4000K-CRI 80	32 W	WHITE
22069113-00	CLD	2,51	LED-3273lm-3000K-CRI 80	33 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated