


Pratica LED

Housing: In vandal resistant polycarbonate, RAL7035 grey, self-extinguishing, UV-stabilized, anti-yellowing.

Optics: Flat diffuser in vandal-resistant and V2 self-extinguishing clear polycarbonate, UV-stabilized, with lengthwise prismatic faceting and internal silking treatment for better dazzle control.

Equipment: The louvre is snap-fastened to the housing.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK08 degree of protection according to EN 60529 standards. These products can be installed on normally inflammable surfaces. Double insulation class.

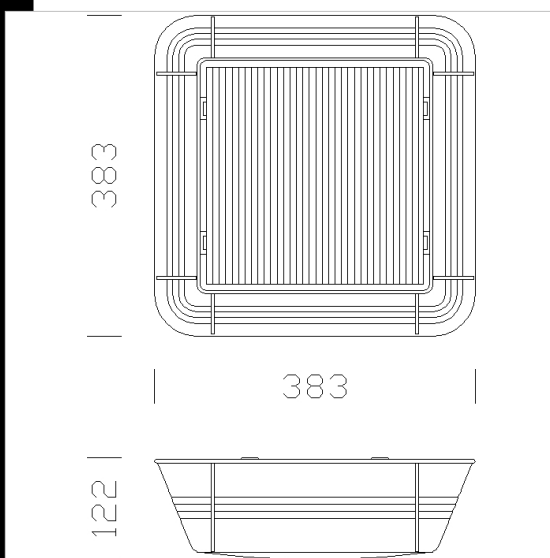

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22069471-00	CLD	1,53	LED-1460lm-4000K-CRI 80	19 W	WHITE



Download

DXF 2D
- d745.dxf

Montaggi
- PRATICA LED rev2.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated