

**Download**

DXF 2D  
- minighost.dxf



## Minighost

Housing: High-temperature resistant thermoplastic material. Supplied with a polycarbonate cone diffuser.

Lampholder: Polycarbonate with phosphorous bronze contacts

Electric gear: 230V-50Hz power supply; 0.75 sqmm cross-section 2-pole wire. 2P terminal block (maximum allowed lead cross-section 2.5 sqmm.)


Regulations: Manufactured in accordance with EN 60598-CEI 34-21 standards. Degree of protection in accordance with EN 60529 standards.

On request

22486526-00 LED SMD - E27 - 12W - 3000K - 1200lm - CRI 80

22486509-00 LED SMD - E27 - 8W - 2700K - 600lm - CRI 80

22486501-00 LED SMD - E27 - 11W - 2700K - 800lm - CRI 80

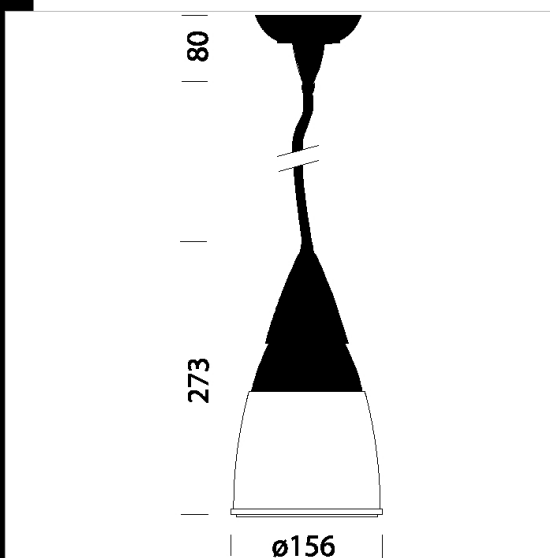

Code	Gear	Kg	Lumen-K-CRI	WTot	Colour
22070076-00	CLD CELL	0.62	LED-800lm-2700K-CRI 80	9 W	ARGENTO

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated