

Minighost - MASTERLED Bulb


Housing: High-temperature resistant thermoplastic material. Supplied with a polycarbonate cone diffuser.

Lampholder: Polycarbonate with phosphorous bronze contacts

Electric gear: 230V-50Hz power supply; 0.75 sqmm cross-section 2-pole wire. 2P terminal block (maximum allowed lead cross-section 2.5 sqmm.)

Regulations: Manufactured in accordance with EN 60598-CEI 34-21 standards. Degree of protection in accordance with EN 60529 standards.

MASTERLED BULB 12W = 60W INC 25000h - 806lm - 2700K

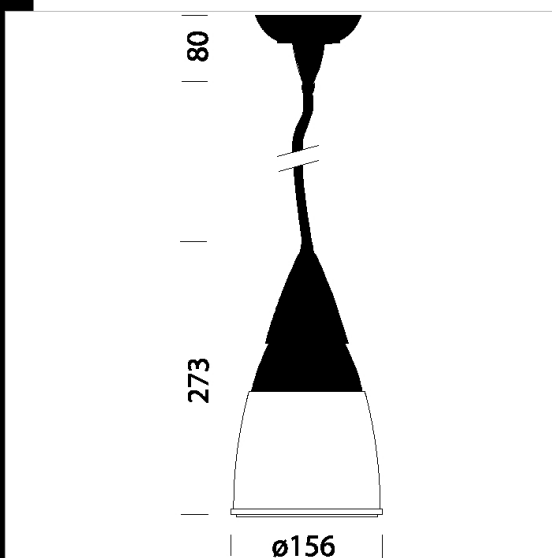

Code	Gear	Kg	Watt	Base	Lamps	Colour
22070079-00	CLD CELL-D	0,85	MASTERLED BULB	E27	806lm-2700K-na	SILVER



Download

DXF 2D
- minighost.dxf