



Download


DXF 2D
- them165L.dxf

Montaggi
- THEMIS_PLA rev3.pdf



Themis L165 - adjustable with lens

Themis stands out for its simple design and high-quality lighting output delivered by latest generation LED sources. Studied to deliver direct lighting, it is equipped with a highly efficient reflector (adjustable) or with lenses to enhance the light beam. Designed to be easily installed inside ceilings thanks to its mounting bracket, it is capable of illuminating full and empty spaces, bringing out all the potential of architectural details and giving rhythm and colour to important interiors. Housing: made of die-cast aluminium with clear polycarbonate diffuser. Equipment: supplied with bracket for ceiling installation. Lens: faceted, with high efficiency output and very low glare rate. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor >0.9. Photobiological safety class: exempt group EN62471. by specific anti-glare optics UGR>19

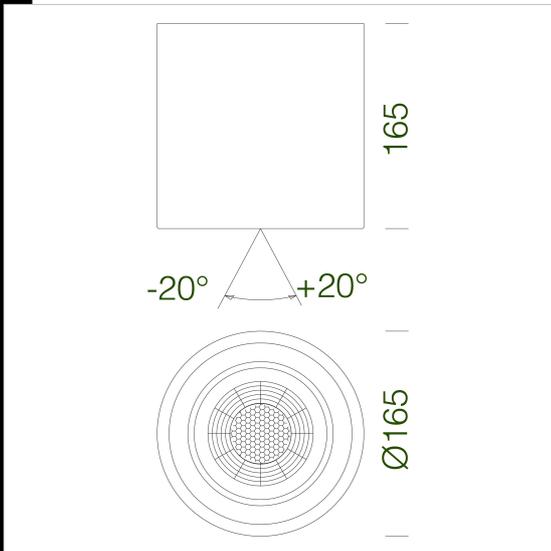

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22071310-00	CLD	0.94	LED COB-2442lm-3000K-24°-CRI 85	25 W	WHITE
22071370-00	CLD	0.94	LED COB-2442lm-3000K-24°-CRI 85	25 W	SILVER
22071310-1241	CLD-D-D	0.99	LED COB-2442lm-3000K-24°-CRI 85	25 W	WHITE
22071370-1241	CLD CELL-D-D	1.00	LED COB-2442lm-3000K-24°-CRI 85	24 W	GREY
22071310-68	CLD	0.95	LED COB-2626lm-4000K-24°-CRI 85	25 W	WHITE
22071370-68	CLD	0.92	LED COB-2626lm-4000K-24°-CRI 85	25 W	SILVER
22071310-6841	CLD-D-D	1.00	LED COB-2626lm-4000K-24°-CRI 85	24 W	WHITE
22071370-6841	CLD CELL-D-D	1.00	LED COB-2626lm-4000K-24°-CRI 85	24 W	GREY

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated