

## Download

DXF 2D  
- g8bo2a.dxf

3DS  
- giotto\_2xar111.3ds

3DM  
- giotto\_2xar111.3dm

Montaggi  
- 771720.giotto.pdf



## GiOtto 2 x ar111 adjustable base

The uniqueness of this version is in its adjustable-angle base, pivoting on its own pin, which makes it ideal for wall or ceiling installations. Perfect for lighting objects placed in any position. Track-mounted adjustable-angle GiOtto with Omnitrack adapter

Housing: Die-cast zamak, with adjustable-angle bows and lamp-holders.


Coating: UV-stabilised, humidity-resistant acrylic-resin liquid paint.

Lampholder: Ceramic with silver-plated contacts.

Electric gear: Includes dimming transformer. Flexible wire. 2P+T terminal block (maximum allowed lead cross-section: 2.5 sqmm).

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.

Lamps: Supply includes AR111-50/75-24° lamps. Possibility to select luminous sources, powers and light beam.. A different lamp can be requested by specifying the desired item in the order.

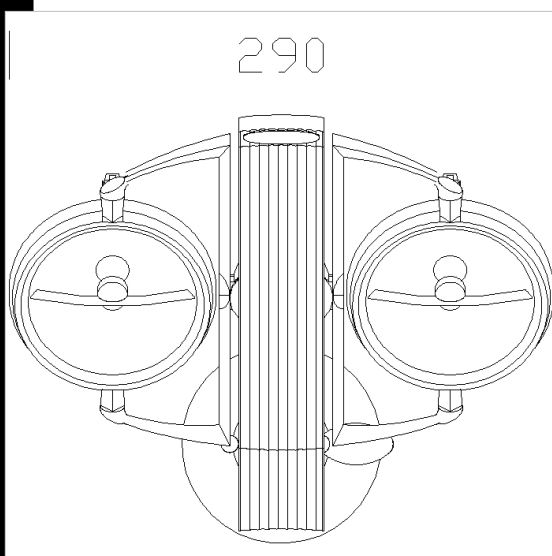

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22070274-00	CTL	0.00	AR111 2x75-5300cd-3000K-Ra 100	0 W	G53	MET. SILVER
22072073-00	CTL	2.50	AR111 2x35IRC-4500cd-3000K-Ra 100	76 W	G53	SILVER
22072071-00	CTL	1.85	AR111 2x50IRC-5800cd-3000K-Ra 100	105 W	G53	SILVER

## Accessories



- Lamps for GiOtto AR111



- Alignment joint



- Hardened glass - Gi Otto



- Conveyor Gi Otto

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated