

Gi Otto 2 x MASTERLED AR111 - fixed base

Gi Otto with "swivelling" fixed central base for wall or ceiling installations. Perfect for lighting particular ambiances. Option to select luminous sources with different types of beams. Track-mounted adjustable-angle GiOtto with Omnitrack adapter

Housing: Die-cast zamak, with adjustable-angle bows and lamp-holders.

Coating: UV-stabilised, humidity-resistant acrylic-resin liquid paint.


Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.

.Luminous flux maintenance 70% 40000h (L70B50)

Download

DXF 2D
- 72077.dxf

Montaggi
- 771720.giotto.pdf

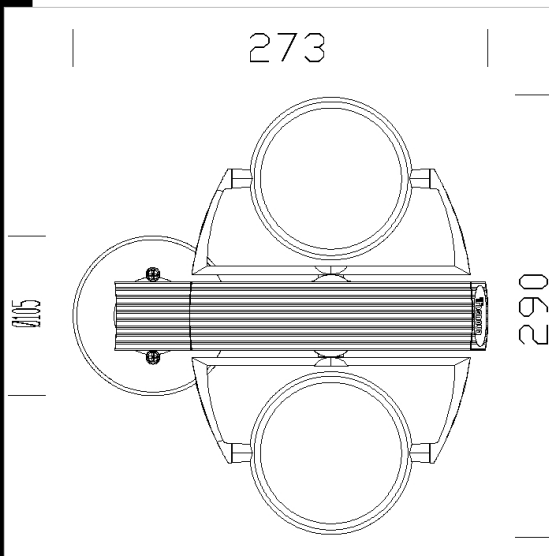

Code	Gear	Kg	Watt	Base	Lamps	Colour
22078672-00	CLD CELL-D	1,50	MASTERLED AR111 15W	G53	860lm-3000K - 24°-CRI 82	SILVER
22072077-00	CLD CELL-D	1,60	MASTERLED AR111 10W	G53	645lm-3000K - 24°-CRI 82	SILVER