

Gi Otto MASTERLED - adjustable base

Gi Otto with "swivelling" fixed central base for wall or ceiling installations. Perfect for lighting particular ambiances. Option to select luminous sources with different types of beams. Track-mounted adjustable-angle GiOtto with Omnitrack adapter


Housing: Die-cast zamak, with adjustable-angle bows and lamp-holders.

Coating: UV-stabilised, humidity-resistant acrylic-resin liquid paint.

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.

Masterled 8W - 3000K - 635lm - CRI80 - 36°

Masterled 8W - 2700K - 660lm - CRI80 - 24°

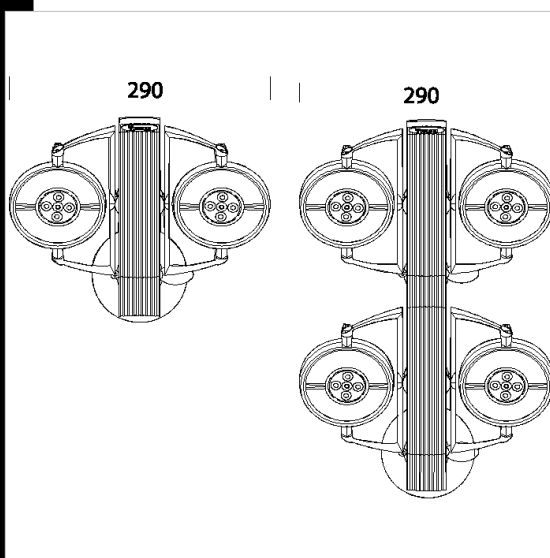

Code	Gear	Kg	Watt	Base	Lamps	Colour
22073078-00	CLD CELL-D	3,05	MASTERLED 4x8W		635lm-2700K - 36°-CRI 80	SILVER
22073079-00	CLD CELL-D	3,10	MASTERLED 4x8W		660lm-3000K - 34°-CRI 80	SILVER
22072078-00	CLD CELL-D	1,80	MASTERLED 8W		635lm-2700K - 36°-CRI 80	SILVER
22072079-00	CLD CELL-D	1,85	MASTERLED 8W		660lm-3000K - 24°-CRI 80	SILVER



Download

DXF 2D
- 22072078.dxf

Montaggi
- 771720.giotto.pdf