



Gi Otto with tiges and Conveyor


Gi Otto with "rotating" anchored central terminal plate for wall or ceiling mounting. Ideal for lighting special environments. Price on request.

Housing: in die cast zama (zinc, aluminium, magnesium) with small arches and directional lampholder.

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.

Download

DXF 2D
- g8_basetta_vision.dxf

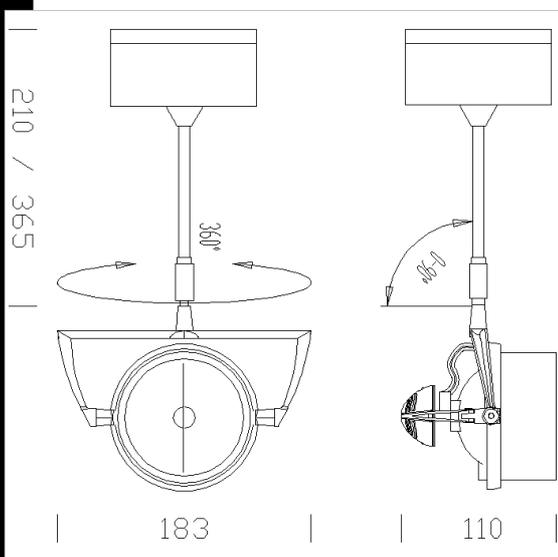

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22074082-00	CTL	0.85	AR111 50IRC-5800cd-3000K-Ra 100	51 W	G53	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated