
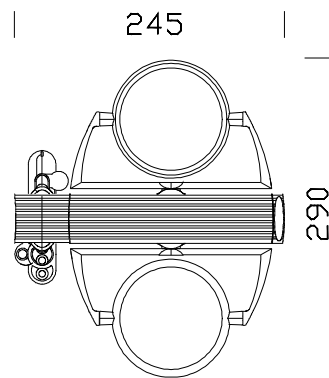


Gi Otto 2 x MASTERLED AR111

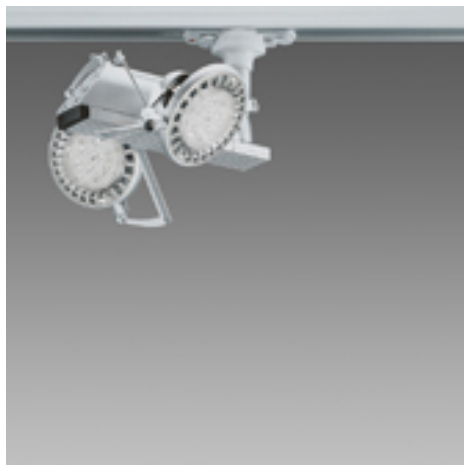

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22078078-00	CLD CELL-F	1.50	met. silver	290x145x140	20	MASTERLED AR111 10W-G53-578lm-3000K - 24°-CRI 82
22078670-00	CLD CELL-F	1.50	met. silver	290x145x140	30	MASTERLED AR111 15W-G53-745lm-3000K - 24°-CRI 82

Gi Otto with "swivelling" fixed central base for wall or ceiling installations. Perfect for lighting particular ambiances. Option to select luminous sources with different types of beams. Track-mounted adjustable-angle GiOtto with Omnitrack adapter

Housing: Die-cast zamak, with adjustable-angle bows and lamp-holders.

Coating: UV-stabilised, humidity-resistant acrylic-resin liquid paint.

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.

Luminous flux maintenance 70% 40000h (L70B50)