


## Gi Otto 2 x LED

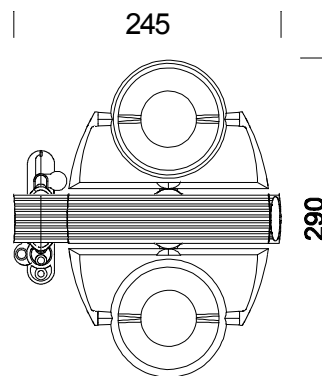

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22078272-00	CLD CELL-F	1.50	met. silver	245x290x140	9,6	POWERLED white-450lm-3000K-25°
22078271-00	CLD CELL-F	1.50	met. silver	245x290x140	9,6	POWERLED white-570lm-4000K-25°
22078270-00	CLD CELL-F	1.50	met. silver	245x290x140	9,6	POWERLED white-570lm-6000K-25°

Gi Otto with "swivelling" fixed central base for wall or ceiling installations. Perfect for lighting particular ambiances. Option to select luminous sources with different types of beams. Track-mounted adjustable-angle GiOtto with Omnitrack adapter

Housing: Die-cast zamak, with adjustable-angle bows and lamp-holders.

Coating: UV-stabilised, humidity-resistant acrylic-resin liquid paint.

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.

Complete with 2 POWERLED 4.8W. - 3000/4000/6000K- 25°