


Gi Otto 2 x ESALED

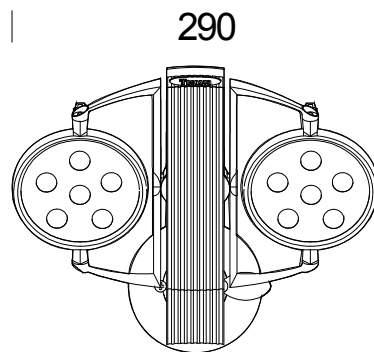

Code	Gear	Colour	Dimensions	W Tot	lamp
22078273-00	CLD CELL	met. silver	290x245x105	34	ESALEDx2-1500lm-4000K - 10°-CRI 80
22078278-00	CLD CELL	met. silver	290x245x105	34	ESALEDx2-1500lm-4000K - 25°-CRI 80
22078279-00	CLD CELL	met. silver	290x245x105	34	ESALEDx2-1500lm-4000K - 40°-CRI 80

Gi Otto with "swivelling" fixed central base for wall or ceiling installations. Perfect for lighting particular ambiances. Option to select luminous sources with different types of beams. Track-mounted adjustable-angle GiOtto with Omnitrack adapter

Housing: Die-cast zamak, with adjustable-angle bows and lamp-holders.

Coating: UV-stabilised, humidity-resistant acrylic-resin liquid paint.

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.