

Gi Otto 4 x MASTERLED AR111 - fixed base


Gi Otto with "swivelling" fixed central base for wall or ceiling installations. Perfect for lighting particular ambiances. Option to select luminous sources with different types of beams. Track-mounted adjustable-angle GiOtto with Omnitrack adapter

Housing: Die-cast zamak, with adjustable-angle bows and lamp-holders.

Coating: UV-stabilised, humidity-resistant acrylic-resin liquid paint.

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.

Luminous flux maintenance 70% 40000h (L70B50)

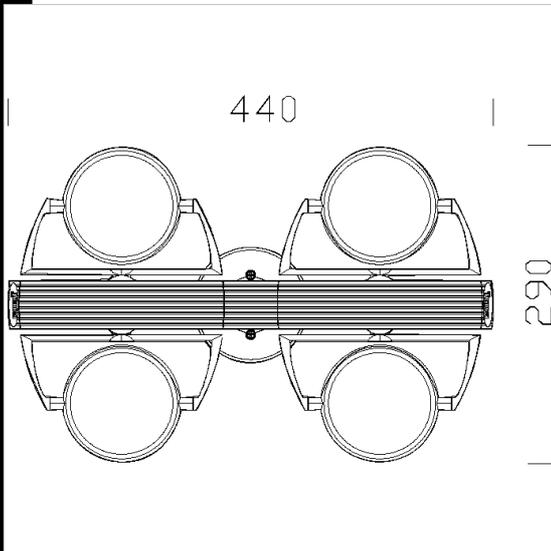

Code	Gear	Kg	Watt	Base	Lamps	Colour
22078575-00	CLD CELL-D	1,48	MASTERLED AR111 10W	G53	645lm-3000K - 24°-CRI 82	SILVER
22078673-00	CLD CELL-D	2,65	MASTERLED AR111 15W	G53	860lm-3000K - 24°-CRI 82	SILVER

Download

DXF 2D
- 78575.dxf

Montaggi
- 771720_giotto.pdf