

Gi Otto 4 x MASTERLED

Gi Otto with "swivelling" fixed central base for wall or ceiling installations. Perfect for lighting particular ambiances. Option to select luminous sources with different types of beams. Track-mounted adjustable-angle GiOtto with Omnitrack adapter

Housing: Die-cast zamak, with adjustable-angle bows and lamp-holders.

Coating: UV-stabilised, humidity-resistant acrylic-resin liquid paint.


Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.

MASTERLED: particularly suited for public spaces such as reception halls entrance lobbies, corridors, stairways and bathrooms where lights stay on all day, 40,000 hours of lifespan, and 80% energy saving compared to ALO 35W Complete Masterled 8W - 3000K - CRI80 - 24/36°.

Download

DXF 2D
- g84di1.dxf

Montaggi
- 771720 giotto.pdf

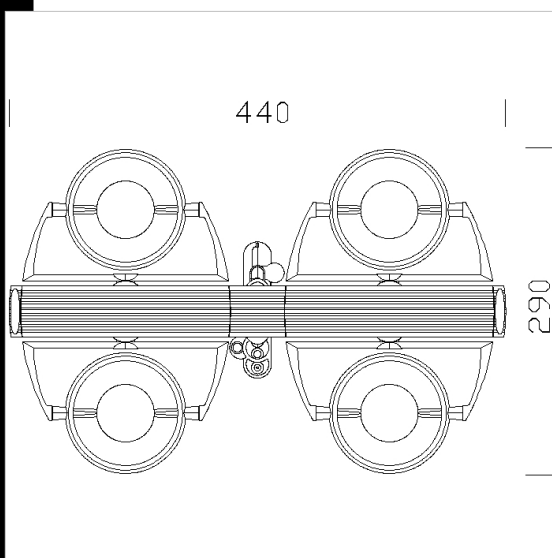

Code	Gear	Kg	Watt	Base	Lamps	Colour
22079173-00	CLD CELL-D	2,64	MASTERLED 4x8W		635lm-2700K - 36°-CRI 80	SILVER
22079176-00	CLD CELL-D	2,65	MASTERLED 4x8W		660lm-3000K - 34°-CRI 80	SILVER