


Gi Otto 4 x ESALED

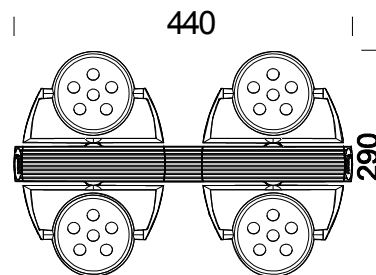

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22079179-00	CLD CELL-F	2.50	met. silver	440x290x140	68	ESALEDx4-1500lm-4000K - 10°-CRI 80
22079174-00	CLD CELL-F	2.50	met. silver	440x290x140	68	ESALEDx4-1500lm-4000K - 25°-CRI 80
22079175-00	CLD CELL-F	2.50	met. silver	440x290x140	68	ESALEDx4-1500lm-4000K - 40°-CRI 80

Gi Otto with "swivelling" fixed central base for wall or ceiling installations. Perfect for lighting particular ambiances. Option to select luminous sources with different types of beams. Track-mounted adjustable-angle GiOtto with Omnitrack adapter

Housing: Die-cast zamak, with adjustable-angle bows and lamp-holders.

Coating: UV-stabilised, humidity-resistant acrylic-resin liquid paint.

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.