


## Gi Otto Comfort LED

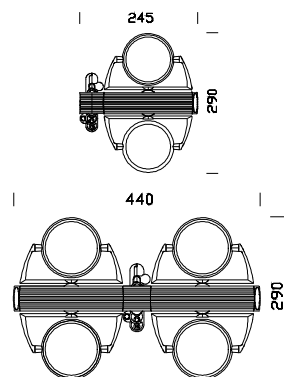

Code	Gear	Kg	Colour	W Tot	lamp
22079372-00	CLD CELL-F	1.50	met. silver	26	AR111 2x13W Confort LED-G53-710lm-3000K-Ra 80
22079374-00	CLD CELL-F	2.50	met. silver	52	AR111 4x13W Confort LED-G53-710lm-3000K-Ra 80

Gi Otto with "swivelling" fixed central base for wall or ceiling installations. Perfect for lighting particular ambiances. Option to select luminous sources with different types of beams. Track-mounted adjustable-angle GiOtto with Omnitrack adapter

Housing: Die-cast zamak, with adjustable-angle bows and lamp-holders.

Coating: UV-stabilised, humidity-resistant acrylic-resin liquid paint.

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.