
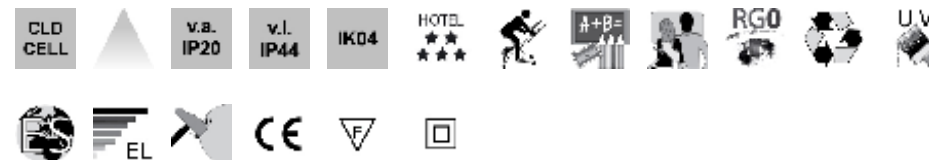


## Roma 6 - DLM FLEX

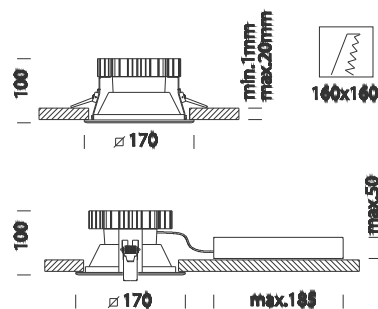

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22080318-00	CLD CELL	1.20	white	170x170x100	14	LED DLM FLEX 1100-1100lm-3000K-CRI 80
22080316-00	CLD CELL	1.20	white	170x170x100	14	LED DLM FLEX 1100-1100lm-4000K-CRI 80
on request	CLD CELL	1.20	white	170x170x100	20	LED DLM FLEX 2000-2000lm-3000K-CRI 80
on request	CLD CELL	1.20	white	170x170x100	20	LED DLM FLEX 2000-2000lm-4000K-CRI 80
on request	CLD CELL	1.20	white	170x170x100	32	LED DLM FLEX 3000-3000lm-3000K-CRI 80
on request	CLD CELL	1.20	white	170x170x100	32	LED DLM FLEX 3000-3000lm-4000K-CRI 80

Adequate lighting ensures proper perception of the environment and enables us to feel comfortable with our surroundings. This is the concept underlying the creation of the Roma recessed floodlight, ideal for quick, low-cost installation in any exhibition setting and fulfil interior decorators' artificial lighting requirements.

Housing: in die cast aluminium

Reflector: In 99.98 aluminium.

Painting: dust painted, using polyester epoxy paint to withstand UV rays.

Standard supply: Includes adjustable steel bracket. Hinge opening of the glass holding ring for easier maintenance.

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

LED: 3000/4000K - 1100/2000/3000lm - CRI80.