

## Milano - 3000 - GEN III - FL

Adequate lighting ensures proper perception of the environment and enables us to feel comfortable with our surroundings. This is the concept underlying the creation of the Milano recessed floodlight, ideal for quick, low-cost installation in any exhibition setting and fulfil interior decorators' artificial lighting requirements.

Housing: Made of steel sheet.

Reflector: in die-cast polished aluminium, high efficiency and anti-glare.

Standard supply: Includes adjustable steel bracket.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

LED COB 25W - 3000lm - 3000K - CRI92

LED COB 25W - 3000lm - 4000K - CRI92


LED COB 49W - 6700lm - 4000K - CRI90

LED COB CREE 63W - 7900lm - 4000K - CRI90

Luminous flux maintenance 70%: 50.000h (L70B50)

Power factor >0.9

Photobiological safety class: exempt group EN62471.

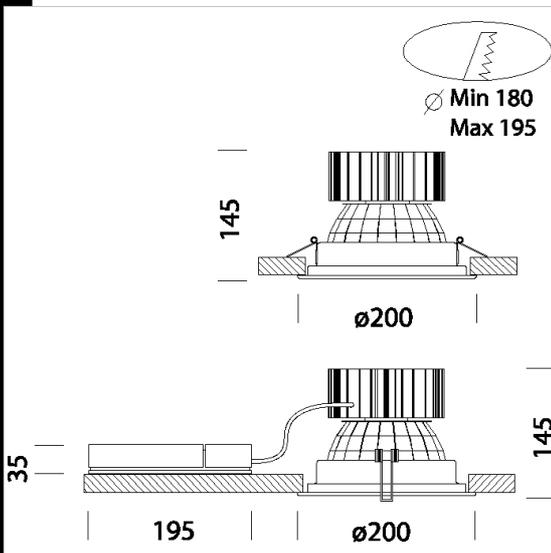

| Code        | Gear         | Kg   | Watt             | Base | Lamps               | Colour |
|-------------|--------------|------|------------------|------|---------------------|--------|
| 22081363-00 | CLD CELL     | 1,30 | LED COB 25W      | -    | 3000lm-3000K-CRI 92 | WHITE  |
| 22081363-12 | CLD CELL-D   | 1,30 | LED COB 25W      | -    | 3000lm-3000K-CRI 92 | WHITE  |
| 22081363-09 | CLD CELL-E   | 1,45 | LED COB 25W      | -    | 3000lm-3000K-CRI 92 | WHITE  |
| 22081363-94 | CLD CELL-D-E | 1,30 | LED COB 25W      | -    | 3000lm-3000K-CRI 92 | WHITE  |
| 22081364-00 | CLD CELL     | 1,20 | LED COB 25W      | -    | 3000lm-4000K-CRI 92 | WHITE  |
| 22081364-12 | CLD CELL-D   | 1,30 | LED COB 25W      | -    | 3000lm-4000K-CRI 92 | WHITE  |
| 22081364-09 | CLD CELL-E   | 1,20 | LED COB 25W      | -    | 3000lm-4000K-CRI 92 | WHITE  |
| 22081364-94 | CLD CELL-D-E | 1,30 | LED COB 25W      | -    | 3000lm-4000K-CRI 92 | WHITE  |
| 22081362-00 | CLD CELL     | 1,19 | LED COB 49W      | -    | 6700lm-4000K-CRI 90 | WHITE  |
| 22081360-00 | CLD CELL     | 2,30 | LED COB CREE 63W | -    | 7900lm-4000K-CRI 90 | WHITE  |

CLD CELL-E

HOTEL  
☆☆☆

CLD CELL

CE

UV

A+B=

Colour quality

IK04

v.l.  
IP40

CLD CELL-D

RG0

CLD CELL-E

v.a.  
IP20

Download  
DXF 2D  
- milanosl.dxf  
Montaggi  
- milanocob.pdf