

## Milano - FS

Adequate lighting ensures proper perception of the environment and enables us to feel comfortable with our surroundings. This is the concept underlying the creation of the Milano recessed floodlight, ideal for quick, low-cost installation in any exhibition setting and fulfil interior decorators' artificial lighting requirements.

Housing: Made of steel sheet.

Reflector: in die-cast polished aluminium, high efficiency and anti-glare.


Standard supply: Includes adjustable steel bracket.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.


Luminous flux maintenance 80%: 50.000h (L80B20).

Power factor >0.95

Photobiological safety class: exempt group EN62471.

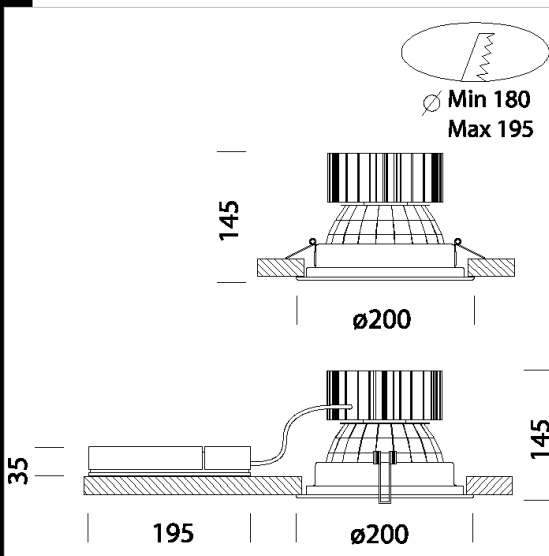

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22081361-00	CLD CELL	1,15	LED COB-2701lm-3000K-31°-CRI 92	26 W	WHITE
22081366-00	CLD CELL	1,20	LED COB-2779lm-4000K-31°-CRI 92	25 W	WHITE
22081365-39	CLD CELL	1,40	LED COB-5111lm-3000K-31°-CRI 92	56 W	WHITE
22081365-00	CLD CELL	1,35	LED COB-5496lm-4000K-31°-CRI 92	54 W	WHITE
22081367-39	CLD CELL	2,30	LED COB-6070lm-3000K-31°-CRI 92	67 W	WHITE
22081367-00	CLD CELL	2,00	LED COB-6527lm-4000K-31°-CRI 92	69 W	WHITE
22081361-1241	CLD CELL-D-D	1,12	LED COB-2701lm-3000K-31°-CRI 92	27 W	WHITE
22081366-1241	CLD CELL-D-D	1,12	LED COB-2779lm-4000K-31°-CRI 92	25 W	WHITE
22081365-3941	CLD CELL-D-D	1,20	LED COB-5111lm-3000K-31°-CRI 92	54 W	WHITE
22081365-1241	CLD CELL-D-D	1,20	LED COB-5496lm-4000K-31°-CRI 92	54 W	WHITE
22081367-3941	CLD CELL-D-D	1,40	LED COB-6070lm-3000K-31°-CRI 92	69 W	WHITE
22081367-1241	CLD CELL-D-D	1,40	LED COB-6527lm-4000K-31°-CRI 92	69 W	WHITE
22081361-09	CLD CELL-E	1,49	LED COB-2701lm-3000K-31°-CRI 92	26 W	WHITE
22081366-09	CLD CELL-E	0,00	LED COB-2779lm-4000K-31°-CRI 92	27 W	WHITE
22081365-0928	CLD CELL-E	0,00	LED COB-5111lm-3000K-31°-CRI 92	54 W	WHITE
22081365-09	CLD CELL-E	0,00	LED COB-5496lm-4000K-31°-CRI 92	54 W	WHITE
22081367-0928	CLD CELL-E	0,00	LED COB-6070lm-3000K-31°-CRI 92	69 W	WHITE
22081367-09	CLD CELL-E	1,81	LED COB-6527lm-4000K-31°-CRI 92	69 W	WHITE
22081361-31	CLD CELL-E	0,00	LED COB-2701lm-3000K-31°-CRI 92	27 W	WHITE
22081366-31	CLD CELL-E	0,00	LED COB-2779lm-4000K-31°-CRI 92	27 W	WHITE
22081365-3957	CLD CELL-E	0,00	LED COB-5111lm-3000K-31°-CRI 92	54 W	WHITE
22081365-31	CLD CELL-E	0,00	LED COB-5496lm-4000K-31°-CRI 92	54 W	WHITE
22081367-3957	CLD CELL-E	0,00	LED COB-6070lm-3000K-31°-CRI 92	69 W	WHITE
22081367-31	CLD CELL-E	0,00	LED COB-6527lm-4000K-31°-CRI 92	69 W	WHITE

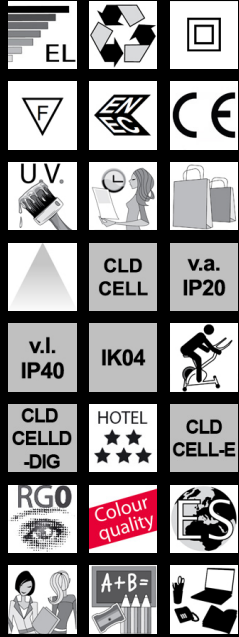

### Download

DXF 2D  
- milanosl.m.dxf

Montaggi  
- MILANO rev7.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated