


## Milano AR111 LED

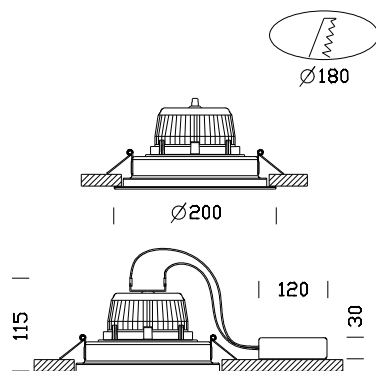

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22081370-00	CLD CELL	1.50	grey/black	0x0x115 Ø200	13	AR111 13W Confort LED-G53-650lm - 25°-4000K-Ra 80

Adequate lighting ensures proper perception of the environment and enables us to feel comfortable with our surroundings. This is the concept underlying the creation of the Milano recessed floodlight, ideal for quick, low-cost installation in any exhibition setting and fulfil interior decorators' artificial lighting requirements.

Housing: Made of steel sheet.

Standard supply: Includes adjustable steel bracket.

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

AR111 LED Confort LED: 4000K - 650lm - 25° - CRI>80