


Milano ESALED

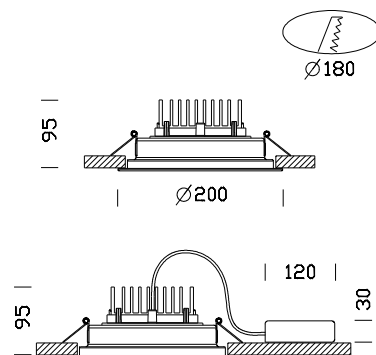

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22081575-00	CLD CELL	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 10°-CRI 80
22081516-00	CLD CELL	1.50	white + white	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 10°-CRI 80
22081576-00	CLD CELL	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 25°-CRI 80
22081517-00	CLD CELL	1.50	white + white	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 25°-CRI 80
22081577-00	CLD CELL	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 40°-CRI 80
22081518-00	CLD CELL	1.50	white + white	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 40°-CRI 80
22081578-00	CLD CELL	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 60°-CRI 80
22081519-00	CLD CELL	1.50	white + white	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 60°-CRI 80
22081570-00	CLD CELL	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 10°-CRI 80
22081511-00	CLD CELL	1.50	white + white	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 10°-CRI 80
22081571-00	CLD CELL	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 25°-CRI 80
22081512-00	CLD CELL	1.50	white + white	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 25°-CRI 80
22081572-00	CLD CELL	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 40°-CRI 80
22081513-00	CLD CELL	1.50	white + white	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 40°-CRI 80
22081573-00	CLD CELL	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 60°-CRI 80
22081514-00	CLD CELL	1.50	white + white	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 60°-CRI 80
22081535-00	CLD CELL	1.50	black + black	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 10°-CRI 80
22081536-00	CLD CELL	1.50	black + black	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 25°-CRI 80
22081537-00	CLD CELL	1.50	black + black	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 40°-CRI 80
22081530-00	CLD CELL	1.50	black + black	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 10°-CRI 80
22081531-00	CLD CELL	1.50	black + black	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 25°-CRI 80

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22081532-00	CLD CELL	1.50	black + black	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 40°-CRI 80

Adequate lighting ensures proper perception of the environment and enables us to feel comfortable with our surroundings. This is the concept underlying the creation of the Milano recessed floodlight, ideal for quick, low-cost installation in any exhibition setting and fulfil interior decorators' artificial lighting requirements.

Housing: Made of steel sheet.

Reflector: Metallized polycarbonate diffuser

Standard supply: Includes adjustable steel bracket. Hinge opening of the glass holding ring for easier maintenance.

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

ESALED: 3000/4000K - 1050mA - 1800/2000lm - CRI 80