


Milano ESALED DIMM DIG

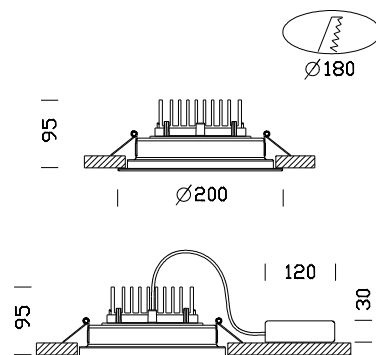

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22081575-1241	CLD CELLDD	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 10°-CRI 80
22081516-1241	CLD CELLDD	1.50	white + white	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 10°-CRI 80
22081535-1241	CLD CELLDD	1.50	black + black	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 10°-CRI 80
22081576-1241	CLD CELLDD	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 25°-CRI 80
22081517-1241	CLD CELLDD	1.50	white + white	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 25°-CRI 80
22081536-1241	CLD CELLDD	1.50	black + black	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 25°-CRI 80
22081577-1241	CLD CELLDD	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 40°-CRI 80
22081518-1241	CLD CELLDD	1.50	white + white	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 40°-CRI 80
22081537-1241	CLD CELLDD	1.50	black + black	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 40°-CRI 80
22081578-1241	CLD CELLDD	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 60°-CRI 80
22081519-1241	CLD CELLDD	1.50	white + white	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 60°-CRI 80
22081570-1241	CLD CELLDD	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 10°-CRI 80
22081511-1241	CLD CELLDD	1.50	white + white	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 10°-CRI 80
22081530-1241	CLD CELLDD	1.50	black + black	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 10°-CRI 80
22081571-1241	CLD CELLDD	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 25°-CRI 80
22081512-1241	CLD CELLDD	1.50	white + white	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 25°-CRI 80
22081531-1241	CLD CELLDD	1.50	black + black	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 25°-CRI 80
22081572-1241	CLD CELLDD	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 40°-CRI 80
22081513-1241	CLD CELLDD	1.50	white + white	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 40°-CRI 80
22081532-1241	CLD CELLDD	1.50	black + black	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 40°-CRI 80
22081573-1241	CLD CELLDD	1.50	grey + glazed	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 60°-CRI 80

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22081514-1241	CLD CELLDD	1.50	white + white	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 60°-CRI 80

Adequate lighting ensures proper perception of the environment and enables us to feel comfortable with our surroundings. This is the concept underlying the creation of the Milano recessed floodlight, ideal for quick, low-cost installation in any exhibition setting and fulfil interior decorators' artificial lighting requirements.

Housing: Made of steel sheet.

Reflector: Metallized polycarbonate diffuser

Standard supply: Includes adjustable steel bracket. Hinge opening of the glass holding ring for easier maintenance.

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

ESALED: 3000/4000K - 1050mA - 1800/2000lm - CRI 80